

Colorimetric Report

Page (1/4)



CCalc 2.0
Copyright © 2011, Denis Freund
All Rights Reserved
licensed for PRAD ProAdviser

Test Device	Fujitsu P27T-7
Target	sRGB
Display Profile	not considered
Rendering Intent	-


White Point / CCT Kelvin	6227K
White Point XYZ (normalized)	98.75 100.0 111.27
DeltaE to D50/ D65	21.33/ 6.57
DeltaE to Blackbody Curve *	7.58
Assumed Target Whitepoint	6200K
DeltaE to Assumed Target Whitepoint	7.72
Brightness / cd/m ² **	170.8
Black Point / cd/m ² **	0.18
Contrast / x:1	949:1
Gradation (Average)	2.19

* Based on CCT ** Measured with X-Rite DTP94 or comparable probe

	Percent	Kelvin	deltaC	deltaE	Gamma
	5	-	-	-	-
	10	6602	0.73	2.82	2.18
	15	6074	0.39	2.25	2.18
	20	5931	1.28	2.27	2.21
	25	5818	2.04	2.2	2.2
	30	5802	2.47	2.51	2.21
	35	5781	2.76	2.77	2.2
	40	5777	3.03	3.04	2.19
	45	5775	3.35	3.38	2.2
	50	5781	3.59	3.6	2.21
	55	5775	3.81	3.87	2.18
	60	5772	3.98	4.1	2.17
	65	5774	4.13	4.22	2.18
	70	5780	4.23	4.26	2.22
	75	5790	4.25	4.26	2.27
	80	5801	4.32	4.33	2.23
	85	5822	4.22	4.27	2.16
	90	5860	3.92	4.0	2.09
	95	5915	3.34	3.35	2.16
	100	6226	-	-	-
	Average	-	3.24*	3.45*	2.19
	Maximum	-	4.32*	4.33*	-
	Range	-	3.94*	-	-

* Only luminance > 1% considered
Without Black Point Compensation

Corresponding Gamma

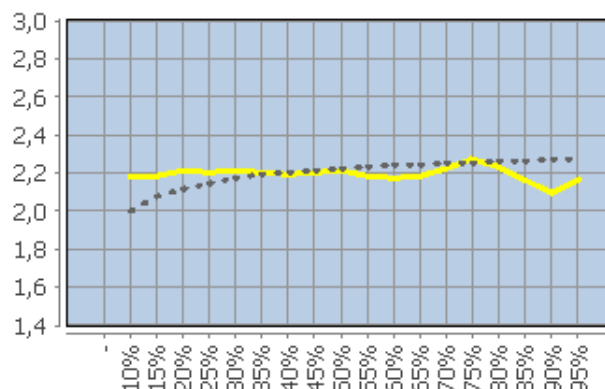

Colorimetric Report

Page (2/4)



CCalc 2.0
Copyright © 2011, Denis Freund
All Rights Reserved
licensed for PRAD ProAdviser

Test Device	Fujitsu P27T-7
Target	sRGB
Display Profile	not considered
Rendering Intent	-

	RGB	deltaC	deltaH	deltaL	deltaE94
	255 0 0	8.83	8.52	0.69	3.72
	0 255 0	18.78	5.13	1.0	3.61
	0 0 255	28.08	13.08	5.49	8.06
	0 255 255	1.96	0.47	0.16	0.68
	255 0 255	12.62	0.67	1.54	2.56
	255 255 0	19.93	0.93	0.99	3.87
	170 85 85	3.27	3.17	0.43	2.38
	85 170 85	9.23	2.61	0.8	3.08
	85 85 170	2.91	2.78	1.33	2.23
	85 170 170	2.28	4.04	0.35	3.08
	170 85 170	3.45	2.62	0.48	1.79
	170 170 85	9.12	0.11	1.04	3.19
	229 0 0	9.12	8.06	1.1	3.87
	204 0 0	6.92	6.51	0.66	3.2
	178 0 0	4.91	4.79	0.55	2.49
	153 0 0	3.64	2.96	0.8	1.86
	127 0 0	1.4	1.62	0.2	0.94
	102 0 0	0.17	0.26	0.12	0.2
	76 0 0	1.63	0.32	0.01	0.62
	0 229 0	17.28	5.49	1.03	3.7
	0 204 0	14.87	5.01	0.45	3.37
	0 178 0	13.02	4.39	0.36	3.17
	0 153 0	11.99	3.78	0.78	3.17
	0 127 0	8.77	2.9	0.04	2.51
	0 102 0	7.18	2.15	0.06	2.22
	0 76 0	2.12	0.34	0.61	0.92
	0 0 229	21.84	11.2	5.57	7.59
	0 0 204	18.12	10.01	5.29	7.11
	0 0 178	15.3	8.74	4.64	6.4
	0 0 153	14.23	7.84	4.04	5.92
	0 0 127	10.71	6.45	3.68	5.26
	0 0 102	7.44	4.82	2.68	4.03
	0 0 76	0.76	2.01	1.16	1.63
	0 229 229	3.16	3.93	0.3	2.56
	0 204 204	3.2	4.66	0.05	3.06
	0 178 178	3.1	4.83	0.05	3.27
	0 153 153	3.34	4.78	0.63	3.48
	0 127 127	2.78	4.52	0.0	3.34
	0 102 102	2.42	4.0	0.02	3.11
	0 76 76	1.45	3.17	0.72	2.63
	229 0 229	8.86	2.76	1.11	2.17
	204 0 204	7.13	2.7	1.34	2.18
	178 0 178	6.17	2.38	1.22	2.02
	153 0 153	6.01	2.02	0.73	1.77
	127 0 127	4.42	1.57	1.14	1.75
	102 0 102	3.27	1.31	0.82	1.4
	76 0 76	1.38	0.94	0.99	1.21

Colorimetric Report

Page (3/4)



CCalc 2.0
Copyright © 2011, Denis Freund
All Rights Reserved
licensed for PRAD ProAdviser

Test Device	Fujitsu P27T-7
Target	sRGB
Display Profile	not considered
Rendering Intent	-

	RGB	deltaC	deltaH	deltaL	deltaE94
	229 229 0	19.01	0.94	1.31	4.03
	204 204 0	16.7	1.18	0.73	3.68
	178 178 0	14.75	1.23	0.65	3.52
	153 153 0	13.49	1.19	1.13	3.62
	127 127 0	10.22	0.98	0.25	2.9
	102 102 0	8.37	0.87	0.14	2.65
	76 76 0	3.85	0.41	0.6	1.52
	255 25 25	9.29	8.57	0.26	3.86
	255 51 51	6.17	5.49	0.14	2.66
	255 76 76	3.86	3.64	0.27	1.9
	255 102 102	2.23	2.84	0.48	1.61
	255 127 127	1.85	2.9	0.46	1.76
	255 153 153	0.6	3.1	0.83	2.1
	255 178 178	1.11	3.44	0.38	2.44
	255 204 204	0.97	3.67	0.23	2.9
	255 229 229	0.43	3.52	0.45	3.13
	25 255 25	19.25	5.2	0.89	3.71
	51 255 51	18.05	4.75	0.87	3.59
	76 255 76	15.62	4.06	0.88	3.32
	102 255 102	12.74	3.46	0.87	3.01
	127 255 127	10.94	3.17	0.82	2.94
	153 255 153	7.91	2.94	0.85	2.68
	178 255 178	7.44	2.87	0.64	2.95
	204 255 204	5.96	2.71	0.48	3.09
	229 255 229	3.46	2.33	0.39	2.77
	25 25 255	28.48	13.04	5.87	8.48
	51 51 255	22.78	10.71	4.57	6.99
	76 76 255	16.14	7.99	2.9	5.12
	102 102 255	10.32	5.69	1.26	3.45
	127 127 255	7.4	4.28	0.63	2.77
	153 153 255	3.93	3.05	0.42	2.04
	178 178 255	3.52	2.53	0.08	1.98
	204 204 255	2.29	1.99	0.2	1.76
	229 229 255	0.47	1.5	0.61	1.42
	25 255 255	2.12	0.56	0.22	0.77
	51 255 255	1.93	0.58	0.21	0.73
	76 255 255	1.48	0.57	0.16	0.61
	102 255 255	0.81	0.58	0.07	0.46
	127 255 255	0.4	0.57	0.03	0.39
	153 255 255	0.5	0.5	0.12	0.41
	178 255 255	0.4	0.42	0.09	0.37
	204 255 255	0.61	0.32	0.11	0.45
	229 255 255	1.13	0.19	0.2	0.85

Colorimetric Report

Page (4/4)



CCalc 2.0
Copyright © 2011, Denis Freund
All Rights Reserved
licensed for PRAD ProAdviser

Test Device	Fujitsu P27T-7
Target	sRGB
Display Profile	not considered
Rendering Intent	-

	RGB	deltaC	deltaH	deltaL	deltaE94
	255 25 255	13.15	0.6	1.76	2.79
	255 51 255	12.32	0.55	1.61	2.65
	255 76 255	10.4	0.44	1.17	2.22
	255 102 255	7.89	0.33	0.59	1.67
	255 127 255	6.26	0.25	0.3	1.42
	255 153 255	3.58	0.18	0.31	0.99
	255 178 255	3.42	0.19	0.06	1.09
	255 204 255	2.39	0.22	0.09	0.99
	255 229 255	0.44	0.16	0.36	0.46
	255 255 25	20.05	0.95	0.92	3.94
	255 255 51	18.0	1.21	0.87	3.71
	255 255 76	14.8	1.55	0.84	3.32
	255 255 102	11.71	1.82	0.78	2.96
	255 255 127	9.85	1.83	0.71	2.83
	255 255 153	7.36	1.81	0.6	2.54
	255 255 178	7.04	1.54	0.47	2.79
	255 255 204	6.01	1.23	0.3	2.93
	255 255 229	3.9	0.78	0.13	2.54
	213 255 0	19.3	2.8	1.19	3.91
	159 191 0	14.56	3.84	0.44	3.66
	106 128 0	9.82	2.19	0.24	2.93
	0 255 85	15.72	4.2	0.79	3.3
	0 191 64	12.16	4.3	0.3	3.21
	0 128 42	9.87	3.9	0.4	3.34
	0 128 255	7.16	6.04	0.94	3.46
	0 96 191	0.61	2.23	1.44	1.88
	0 64 128	1.54	2.74	1.91	2.6
	170 0 255	17.58	4.77	2.65	4.17
	127 0 191	9.32	4.19	2.62	3.58
	85 0 128	6.38	2.5	1.97	2.75
	255 0 42	5.9	6.92	0.51	3.08
	191 0 32	4.86	6.25	0.28	3.12
	128 0 21	3.56	5.79	0.17	3.31
	170 85 0	9.7	3.09	0.32	3.01
	0 170 85	10.0	3.87	0.84	3.31
	85 0 170	11.1	4.65	2.98	4.17
	0 85 170	1.9	3.04	1.48	2.32
	170 0 85	2.12	2.39	0.23	1.37
	85 170 0	12.99	3.59	0.62	3.31
	123 127 127	2.11	2.7	0.31	3.31
	127 123 127	0.62	3.26	0.3	3.19
	127 127 123	3.51	0.14	0.33	3.2
	Average	7.87	3.2	0.95	2.81
	Maximum	28.48	13.08	5.87	8.48