

Colorimetric Report

Page (1/4)



CCalc 2.0
Copyright © 2011, Denis Freund
All Rights Reserved
licensed for PRAD ProAdviser

Test Device	LG_34UM65
Target	sRGB
Display Profile	not considered
Rendering Intent	-


White Point / CCT Kelvin	6103K
White Point XYZ (normalized)	93.68 100.0 99.74
DeltaE to D50/ D65	13.89/ 6.25
DeltaE to Blackbody Curve *	3.19
Assumed Target Whitepoint	6100K
DeltaE to Assumed Target Whitepoint	3.18
Brightness / cd/m ² **	312.6
Black Point / cd/m ² **	0.29
Contrast / x:1	1078:1
Gradation (Average)	2.07

* Based on CCT ** Measured with X-Rite DTP94 or comparable probe

	Percent	Kelvin	deltaC	deltaE	Gamma
	5	-	-	-	-
	10	6451	1.07	1.4	2.07
	15	6378	1.07	1.39	2.11
	20	6226	0.83	0.86	2.13
	25	6197	0.88	0.98	2.13
	30	6176	0.8	1.16	2.14
	35	6185	1.03	1.45	2.13
	40	6150	0.94	2.08	2.1
	45	6133	0.65	2.49	2.08
	50	6127	0.64	2.54	2.08
	55	6131	0.76	2.43	2.07
	60	6112	0.48	2.41	2.07
	65	6113	0.57	2.41	2.06
	70	6112	0.76	2.45	2.05
	75	6127	0.84	2.2	2.03
	80	6127	0.84	2.2	1.99
	85	6094	0.48	1.9	1.94
	90	6034	0.68	1.56	1.93
	95	6013	1.06	1.08	2.12
	100	6102	-	-	-
	Average	-	0.78*	1.86*	2.07
	Maximum	-	1.07*	2.54*	-
	Range	-	2.11*	-	-

* Only luminance > 1% considered
Without Black Point Compensation

Corresponding Gamma

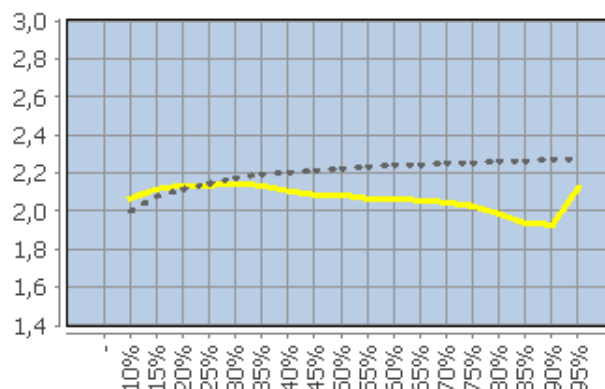

Colorimetric Report

Page (2/4)



CCalc 2.0
Copyright © 2011, Denis Freund
All Rights Reserved
licensed for PRAD ProAdviser

Test Device	LG_34UM65
Target	sRGB
Display Profile	not considered
Rendering Intent	-

	RGB	deltaC	deltaH	deltaL	deltaE94
	255 0 0	10.4	8.88	0.51	3.94
	0 255 0	15.29	10.83	0.71	4.61
	0 0 255	4.66	0.05	1.32	1.47
	0 255 255	0.89	2.34	0.12	1.37
	255 0 255	5.55	2.66	0.01	1.32
	255 255 0	20.52	0.21	0.2	3.83
	170 85 85	8.71	0.72	1.38	3.51
	85 170 85	10.14	3.71	2.74	4.45
	85 85 170	9.24	0.42	1.75	3.29
	85 170 170	2.37	0.53	2.88	3.1
	170 85 170	9.01	1.47	1.62	3.13
	170 170 85	14.23	0.1	2.52	5.33
	229 0 0	15.64	8.25	3.09	5.43
	204 0 0	17.3	7.2	4.93	6.78
	178 0 0	14.73	5.34	4.78	6.25
	153 0 0	12.26	3.83	4.43	5.62
	127 0 0	10.27	2.91	4.16	5.22
	102 0 0	7.75	2.02	3.66	4.51
	76 0 0	4.17	1.4	2.66	3.19
	0 229 0	17.61	10.6	3.45	6.04
	0 204 0	17.43	9.83	4.24	6.56
	0 178 0	15.63	8.78	4.01	6.26
	0 153 0	13.95	7.71	3.84	5.96
	0 127 0	12.15	6.59	3.6	5.6
	0 102 0	9.35	5.25	2.94	4.73
	0 76 0	4.76	3.11	1.53	2.77
	0 0 229	9.28	0.57	3.48	3.76
	0 0 204	10.45	0.97	4.46	4.8
	0 0 178	9.85	1.15	4.51	4.86
	0 0 153	8.71	1.16	4.21	4.57
	0 0 127	7.55	1.21	4.13	4.48
	0 0 102	5.81	1.26	3.72	4.03
	0 0 76	4.69	0.09	2.45	2.81
	0 229 229	1.32	0.75	3.19	3.25
	0 204 204	1.3	0.73	4.13	4.18
	0 178 178	1.36	0.41	4.03	4.07
	0 153 153	1.45	0.11	3.96	4.0
	0 127 127	1.32	0.31	3.74	3.78
	0 102 102	0.93	0.32	3.18	3.22
	0 76 76	0.14	0.52	1.72	1.77
	229 0 229	7.79	1.66	2.68	3.07
	204 0 204	9.34	2.47	3.64	4.15
	178 0 178	8.74	2.45	3.56	4.11
	153 0 153	7.87	2.29	3.38	3.94
	127 0 127	7.39	2.26	3.31	3.93
	102 0 102	6.13	2.03	2.82	3.45
	76 0 76	3.63	1.72	1.79	2.35

Colorimetric Report

Page (3/4)



CCalc 2.0
Copyright © 2011, Denis Freund
All Rights Reserved
licensed for PRAD ProAdviser

Test Device	LG_34UM65
Target	sRGB
Display Profile	not considered
Rendering Intent	-

	RGB	deltaC	deltaH	deltaL	deltaE94
	229 229 0	21.77	0.45	2.29	4.91
	204 204 0	21.23	1.1	3.31	5.63
	178 178 0	19.06	0.8	3.23	5.47
	153 153 0	17.04	0.55	3.19	5.35
	127 127 0	14.77	0.38	3.01	5.09
	102 102 0	11.78	0.61	2.49	4.43
	76 76 0	6.73	0.91	1.13	2.71
	255 25 25	12.61	10.33	1.05	4.87
	255 51 51	9.76	6.24	1.62	3.68
	255 76 76	6.31	2.36	1.61	2.39
	255 102 102	3.65	0.08	1.2	1.51
	255 127 127	1.24	0.46	0.33	0.55
	255 153 153	0.28	0.83	0.12	0.53
	255 178 178	0.16	0.94	0.42	0.77
	255 204 204	0.65	1.01	0.82	1.18
	255 229 229	0.36	0.22	0.67	0.74
	25 255 25	16.73	11.02	0.59	4.84
	51 255 51	16.48	10.04	0.5	4.67
	76 255 76	13.81	8.02	0.47	4.02
	102 255 102	10.07	5.75	0.52	3.16
	127 255 127	6.22	4.07	0.64	2.41
	153 255 153	3.68	2.69	0.7	1.82
	178 255 178	1.88	1.73	0.75	1.38
	204 255 204	0.03	0.72	0.82	0.95
	229 255 229	0.32	0.78	0.64	0.91
	25 25 255	6.74	0.67	0.6	1.18
	51 51 255	6.8	0.71	0.44	1.19
	76 76 255	5.66	0.43	0.72	1.24
	102 102 255	3.39	0.02	1.51	1.66
	127 127 255	1.65	0.17	2.11	2.14
	153 153 255	1.08	0.06	2.14	2.16
	178 178 255	0.95	0.24	1.91	1.95
	204 204 255	0.33	0.27	1.83	1.84
	229 229 255	0.7	0.44	1.19	1.31
	25 255 255	0.38	0.95	0.78	0.96
	51 255 255	0.92	0.93	0.69	0.93
	76 255 255	1.03	0.92	0.67	0.93
	102 255 255	0.89	0.93	0.65	0.92
	127 255 255	0.24	0.94	0.73	0.95
	153 255 255	0.08	0.92	0.74	0.97
	178 255 255	0.28	0.9	0.73	0.99
	204 255 255	0.56	0.86	0.72	1.05
	229 255 255	0.61	0.52	0.52	0.82

Colorimetric Report

Page (4/4)



CCalc 2.0
Copyright © 2011, Denis Freund
All Rights Reserved
licensed for PRAD ProAdviser

Test Device	LG_34UM65
Target	sRGB
Display Profile	not considered
Rendering Intent	-

	RGB	deltaC	deltaH	deltaL	deltaE94
	255 25 255	6.9	2.68	0.43	1.56
	255 51 255	7.67	2.57	0.69	1.77
	255 76 255	7.33	2.47	0.64	1.77
	255 102 255	5.9	2.38	0.29	1.57
	255 127 255	3.6	2.25	0.35	1.35
	255 153 255	2.45	1.99	0.61	1.35
	255 178 255	1.67	1.66	0.75	1.33
	255 204 255	0.65	1.26	0.94	1.3
	255 229 255	0.63	0.79	0.73	1.04
	255 255 25	22.55	0.55	0.18	4.29
	255 255 51	24.52	1.0	0.16	4.88
	255 255 76	22.51	0.69	0.17	4.78
	255 255 102	18.16	0.21	0.13	4.23
	255 255 127	12.62	0.45	0.05	3.31
	255 255 153	8.61	0.81	0.04	2.66
	255 255 178	5.59	0.95	0.14	2.13
	255 255 204	2.55	1.08	0.25	1.44
	255 255 229	1.42	0.81	0.22	1.14
	213 255 0	22.23	8.04	1.74	5.5
	159 191 0	31.37	12.11	7.97	11.88
	106 128 0	23.62	10.03	6.46	10.56
	0 255 85	10.88	8.25	0.66	3.79
	0 191 64	13.91	8.44	4.03	6.24
	0 128 42	11.54	6.87	3.55	5.89
	0 128 255	0.41	2.0	3.09	3.23
	0 96 191	8.43	2.46	3.48	4.39
	0 64 128	8.62	3.42	2.13	4.22
	170 0 255	4.81	1.71	2.19	2.39
	127 0 191	10.08	1.9	3.84	4.35
	85 0 128	8.11	2.48	2.98	3.74
	255 0 42	7.12	7.37	0.62	3.36
	191 0 32	14.65	8.88	4.19	6.75
	128 0 21	10.46	6.53	3.57	5.84
	170 85 0	14.99	0.44	1.3	4.13
	0 170 85	8.89	5.7	3.86	5.31
	85 0 170	9.65	2.14	3.53	4.1
	0 85 170	8.44	2.73	2.97	4.17
	170 0 85	5.14	0.12	3.03	3.31
	85 170 0	26.11	0.65	7.4	9.31
	123 127 127	0.03	0.67	2.51	2.59
	127 123 127	1.01	0.24	2.44	2.61
	127 127 123	0.02	0.08	2.47	2.47
	Average	8.06	2.65	2.1	3.42
	Maximum	31.37	12.11	7.97	11.88