

# Colorimetric Report

## Page (1/5)



CCalc 2.3  
Copyright © 2016, Denis Freund  
All Rights Reserved  
lic. for PRAD ProAdviser

|                  |                                         |
|------------------|-----------------------------------------|
| Date             | Friday, April 6, 2018                   |
| Tester           | Oliver Jachmann                         |
| Display          | Iiyama ProLite X3272UHS-B1              |
| Sensor           | X-Rite i1 Display Pro (Corr.: WLED, XR) |
| Testchart        | In accordance with ISO 12646:2007 (1)   |
| Target           | sRGB                                    |
| Display Profile  | Considered                              |
| Rendering Intent | Relative colorimetric                   |

(1) Five equally spaced code values for each channel

|                                     |                     |
|-------------------------------------|---------------------|
| White Point (CCT)                   | 6645 Kelvin         |
| White Point XYZ (normalized)        | 92.87 100.00 107.23 |
| DeltaE to D50/ D65                  | 19.28/ 3.98         |
| Assumed Target Whitepoint (2)       | 6600 Kelvin         |
| DeltaE to Assumed Target Whitepoint | 4.18                |
| Brightness                          | 145.39 cd/m²        |
| Black Point                         | 0.06 cd/m²          |
| Contrast (x:1)                      | 2423:1              |
| Gradation (Average)                 | 2.18                |


(2) Daylight

|  | Percent     | Kelvin | Delta C | Delta E | Gamma |
|--|-------------|--------|---------|---------|-------|
|  | 5           | -      | -       | -       | -     |
|  | 10          | 6656   | 0.22    | 0.56    | 1.98  |
|  | 15          | 6421   | 0.54    | 0.62    | 2.06  |
|  | 20          | 6678   | 0.68    | 0.72    | 2.10  |
|  | 25          | 6609   | 0.11    | 0.41    | 2.13  |
|  | 30          | 6573   | 1.17    | 1.17    | 2.17  |
|  | 35          | 6803   | 0.85    | 0.85    | 2.19  |
|  | 40          | 6694   | 1.09    | 1.13    | 2.19  |
|  | 45          | 6712   | 1.91    | 1.91    | 2.22  |
|  | 50          | 6689   | 1.28    | 1.28    | 2.22  |
|  | 55          | 6737   | 1.28    | 1.29    | 2.22  |
|  | 60          | 6743   | 1.58    | 1.58    | 2.24  |
|  | 65          | 6679   | 0.69    | 0.70    | 2.24  |
|  | 70          | 6689   | 1.55    | 1.55    | 2.24  |
|  | 75          | 6738   | 1.50    | 1.50    | 2.24  |
|  | 80          | 6689   | 0.71    | 0.79    | 2.21  |
|  | 85          | 6671   | 1.02    | 1.03    | 2.25  |
|  | 90          | 6699   | 0.65    | 0.70    | 2.20  |
|  | 95          | 6694   | 1.01    | 1.02    | 2.21  |
|  | 100 (3)     | 6644   | -       | -       | -     |
|  | Average (4) | -      | 0.99    | 1.04    | 2.18  |
|  | Maximum (4) | -      | 1.91    | 1.91    | -     |
|  | Range (4)   | -      | 2.2     | -       | -     |

(3) Visual adaptation to display whitepoint is assumed

(4) Only luminance > 1% considered

### Corresponding Gamma

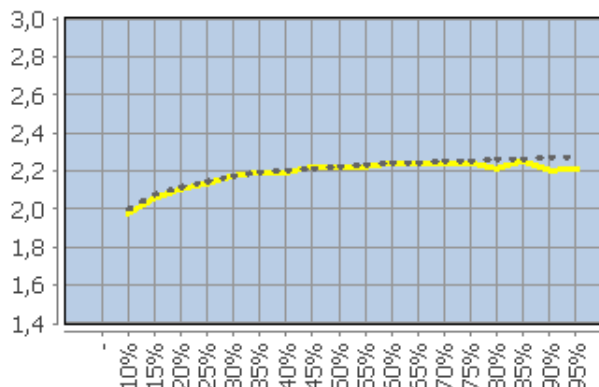

# Colorimetric Report

## Page (2/5)



CCalc 2.3  
Copyright © 2016, Denis Freund  
All Rights Reserved  
lic. for PRAD ProAdviser

|                  |                                         |
|------------------|-----------------------------------------|
| Date             | Friday, April 6, 2018                   |
| Tester           | Oliver Jachmann                         |
| Display          | Iiyama ProLite X3272UHS-B1              |
| Sensor           | X-Rite i1 Display Pro (Corr.: WLED, XR) |
| Testchart        | In accordance with ISO 12646:2007 (1)   |
| Target           | sRGB                                    |
| Display Profile  | Considered                              |
| Rendering Intent | Relative colorimetric                   |

(1) Five equally spaced code values for each channel

|  | RGB        | Delta C | Delta H | Delta L | Delta E94 |
|--|------------|---------|---------|---------|-----------|
|  | 0 0 0      | 0.35    | 0.00    | 0.37    | 0.51      |
|  | 0 0 63     | 1.05    | 2.10    | 0.54    | 1.43      |
|  | 0 0 127    | 6.03    | 5.04    | 1.80    | 3.20      |
|  | 0 0 191    | 6.12    | 5.13    | 1.21    | 2.53      |
|  | 0 0 255    | 2.03    | 2.72    | 0.46    | 1.06      |
|  | 0 63 0     | 1.51    | 1.63    | 0.03    | 1.11      |
|  | 0 63 63    | 0.45    | 0.73    | 0.19    | 0.65      |
|  | 0 63 127   | 0.70    | 0.31    | 0.57    | 0.64      |
|  | 0 63 191   | 3.87    | 2.96    | 1.19    | 1.99      |
|  | 0 63 255   | 2.27    | 1.95    | 0.17    | 0.83      |
|  | 0 127 0    | 0.48    | 2.02    | 0.39    | 1.06      |
|  | 0 127 63   | 0.12    | 1.25    | 0.14    | 0.72      |
|  | 0 127 127  | 0.30    | 1.16    | 0.54    | 0.98      |
|  | 0 127 191  | 1.46    | 1.25    | 0.43    | 1.02      |
|  | 0 127 255  | 1.21    | 0.03    | 0.01    | 0.28      |
|  | 0 191 0    | 0.49    | 2.52    | 0.05    | 1.03      |
|  | 0 191 63   | 0.32    | 2.17    | 0.13    | 0.97      |
|  | 0 191 127  | 0.24    | 1.53    | 0.31    | 0.87      |
|  | 0 191 191  | 0.09    | 1.53    | 0.30    | 1.00      |
|  | 0 191 255  | 1.04    | 0.01    | 0.09    | 0.35      |
|  | 0 255 0    | 2.14    | 0.41    | 0.26    | 0.45      |
|  | 0 255 63   | 2.67    | 0.60    | 0.29    | 0.58      |
|  | 0 255 127  | 2.99    | 0.83    | 0.43    | 0.81      |
|  | 0 255 191  | 2.77    | 1.18    | 0.37    | 0.98      |
|  | 0 255 255  | 1.16    | 0.89    | 0.07    | 0.63      |
|  | 63 0 0     | 1.16    | 1.17    | 0.15    | 0.92      |
|  | 63 0 63    | 3.65    | 0.73    | 0.25    | 1.35      |
|  | 63 0 127   | 4.55    | 2.49    | 0.86    | 1.80      |
|  | 63 0 191   | 5.18    | 2.93    | 1.20    | 1.89      |
|  | 63 0 255   | 1.94    | 1.02    | 0.05    | 0.45      |
|  | 63 63 0    | 0.60    | 0.47    | 0.61    | 0.72      |
|  | 63 63 63   | 0.12    | 0.01    | 0.35    | 0.37      |
|  | 63 63 127  | 1.55    | 1.31    | 0.19    | 1.00      |
|  | 63 63 191  | 3.16    | 2.36    | 0.59    | 1.42      |
|  | 63 63 255  | 1.24    | 0.47    | 0.25    | 0.37      |
|  | 63 127 0   | 1.34    | 1.05    | 0.11    | 0.64      |
|  | 63 127 63  | 0.61    | 1.06    | 0.25    | 0.71      |
|  | 63 127 127 | 0.79    | 1.74    | 0.24    | 1.40      |
|  | 63 127 191 | 1.78    | 1.62    | 0.49    | 1.30      |
|  | 63 127 255 | 0.66    | 0.12    | 0.24    | 0.29      |
|  | 63 191 0   | 0.95    | 2.07    | 0.10    | 0.89      |
|  | 63 191 63  | 0.48    | 1.50    | 0.15    | 0.71      |
|  | 63 191 127 | 0.15    | 1.14    | 0.04    | 0.63      |
|  | 63 191 191 | 0.47    | 1.83    | 0.38    | 1.27      |
|  | 63 191 255 | 0.65    | 0.42    | 0.37    | 0.50      |
|  | 63 255 0   | 2.95    | 0.31    | 0.30    | 0.57      |
|  | 63 255 63  | 3.05    | 0.27    | 0.33    | 0.63      |

# Colorimetric Report

## Page (3/5)



CCalc 2.3  
Copyright © 2016, Denis Freund  
All Rights Reserved  
lic. for PRAD ProAdviser

|                  |                                         |
|------------------|-----------------------------------------|
| Date             | Friday, April 6, 2018                   |
| Tester           | Oliver Jachmann                         |
| Display          | Iiyama ProLite X3272UHS-B1              |
| Sensor           | X-Rite i1 Display Pro (Corr.: WLED, XR) |
| Testchart        | In accordance with ISO 12646:2007 (1)   |
| Target           | sRGB                                    |
| Display Profile  | Considered                              |
| Rendering Intent | Relative colorimetric                   |

(1) Five equally spaced code values for each channel

|  | RGB         | Delta C | Delta H | Delta L | Delta E94 |
|--|-------------|---------|---------|---------|-----------|
|  | 63 255 127  | 2.68    | 0.49    | 0.18    | 0.61      |
|  | 63 255 191  | 2.99    | 1.20    | 0.43    | 1.08      |
|  | 63 255 255  | 1.30    | 1.12    | 0.01    | 0.78      |
|  | 127 0 0     | 0.02    | 0.14    | 0.72    | 0.72      |
|  | 127 0 63    | 0.56    | 0.20    | 0.81    | 0.83      |
|  | 127 0 127   | 1.35    | 1.15    | 0.28    | 0.71      |
|  | 127 0 191   | 3.04    | 1.58    | 0.14    | 0.87      |
|  | 127 0 255   | 1.34    | 0.64    | 0.47    | 0.56      |
|  | 127 63 0    | 1.45    | 0.81    | 0.45    | 0.78      |
|  | 127 63 63   | 0.15    | 0.06    | 0.64    | 0.64      |
|  | 127 63 127  | 1.22    | 0.67    | 0.21    | 0.61      |
|  | 127 63 191  | 1.64    | 0.98    | 0.03    | 0.59      |
|  | 127 63 255  | 0.69    | 0.60    | 0.59    | 0.64      |
|  | 127 127 0   | 1.74    | 0.33    | 0.09    | 0.52      |
|  | 127 127 63  | 2.12    | 0.42    | 0.04    | 0.86      |
|  | 127 127 127 | 1.25    | 0.13    | 0.01    | 1.25      |
|  | 127 127 191 | 1.81    | 1.06    | 0.21    | 0.99      |
|  | 127 127 255 | 0.56    | 0.07    | 0.39    | 0.41      |
|  | 127 191 0   | 2.13    | 1.53    | 0.07    | 0.82      |
|  | 127 191 63  | 1.60    | 0.92    | 0.10    | 0.60      |
|  | 127 191 127 | 0.61    | 0.75    | 0.01    | 0.51      |
|  | 127 191 191 | 0.02    | 0.88    | 0.04    | 0.67      |
|  | 127 191 255 | 0.48    | 0.51    | 0.33    | 0.50      |
|  | 127 255 0   | 2.45    | 0.03    | 0.21    | 0.46      |
|  | 127 255 63  | 3.21    | 0.22    | 0.23    | 0.64      |
|  | 127 255 127 | 2.40    | 0.11    | 0.07    | 0.54      |
|  | 127 255 191 | 3.45    | 1.14    | 0.27    | 1.22      |
|  | 127 255 255 | 1.21    | 0.94    | 0.02    | 0.75      |
|  | 191 0 0     | 1.42    | 1.08    | 0.98    | 1.13      |
|  | 191 0 63    | 0.06    | 0.29    | 0.98    | 0.99      |
|  | 191 0 127   | 0.64    | 0.41    | 0.57    | 0.62      |
|  | 191 0 191   | 1.57    | 0.94    | 0.34    | 0.60      |
|  | 191 0 255   | 0.45    | 0.33    | 0.70    | 0.71      |
|  | 191 63 0    | 1.76    | 0.97    | 0.82    | 1.02      |
|  | 191 63 63   | 0.55    | 0.12    | 0.92    | 0.93      |
|  | 191 63 127  | 1.09    | 0.25    | 0.58    | 0.67      |
|  | 191 63 191  | 2.35    | 0.80    | 0.30    | 0.71      |
|  | 191 63 255  | 0.39    | 0.56    | 0.69    | 0.73      |
|  | 191 127 0   | 1.57    | 0.20    | 0.35    | 0.54      |
|  | 191 127 63  | 1.32    | 0.58    | 0.32    | 0.62      |
|  | 191 127 127 | 0.03    | 1.07    | 0.20    | 0.79      |
|  | 191 127 191 | 1.76    | 0.07    | 0.21    | 0.64      |
|  | 191 127 255 | 0.13    | 0.06    | 0.84    | 0.84      |
|  | 191 191 0   | 1.99    | 0.87    | 0.35    | 0.69      |
|  | 191 191 63  | 1.65    | 0.88    | 0.24    | 0.66      |
|  | 191 191 127 | 1.32    | 0.08    | 0.10    | 0.53      |
|  | 191 191 191 | 1.47    | 0.18    | 0.11    | 1.49      |

# Colorimetric Report

## Page (4/5)



CCalc 2.3  
Copyright © 2016, Denis Freund  
All Rights Reserved  
lic. for PRAD ProAdviser

|                  |                                         |
|------------------|-----------------------------------------|
| Date             | Friday, April 6, 2018                   |
| Tester           | Oliver Jachmann                         |
| Display          | Iiyama ProLite X3272UHS-B1              |
| Sensor           | X-Rite i1 Display Pro (Corr.: WLED, XR) |
| Testchart        | In accordance with ISO 12646:2007 (1)   |
| Target           | sRGB                                    |
| Display Profile  | Considered                              |
| Rendering Intent | Relative colorimetric                   |

(1) Five equally spaced code values for each channel

|  | RGB             | Delta C | Delta H | Delta L | Delta E94 |
|--|-----------------|---------|---------|---------|-----------|
|  | 191 191 255     | 0.34    | 0.60    | 0.48    | 0.63      |
|  | 191 255 0       | 2.67    | 0.77    | 0.00    | 0.57      |
|  | 191 255 63      | 3.12    | 0.76    | 0.03    | 0.69      |
|  | 191 255 127     | 3.25    | 0.66    | 0.20    | 0.89      |
|  | 191 255 191     | 3.07    | 0.02    | 0.13    | 1.10      |
|  | 191 255 255     | 1.07    | 0.33    | 0.22    | 0.65      |
|  | 255 0 0         | 1.15    | 1.02    | 1.06    | 1.15      |
|  | 255 0 63        | 1.14    | 0.18    | 1.01    | 1.04      |
|  | 255 0 127       | 0.71    | 0.32    | 0.80    | 0.83      |
|  | 255 0 191       | 1.14    | 0.02    | 0.50    | 0.55      |
|  | 255 0 255       | 0.86    | 0.38    | 0.93    | 0.96      |
|  | 255 63 0        | 1.30    | 0.98    | 1.06    | 1.16      |
|  | 255 63 63       | 1.10    | 0.48    | 0.99    | 1.04      |
|  | 255 63 127      | 0.75    | 0.49    | 0.81    | 0.86      |
|  | 255 63 191      | 0.65    | 0.20    | 0.61    | 0.64      |
|  | 255 63 255      | 1.04    | 0.05    | 1.04    | 1.05      |
|  | 255 127 0       | 2.14    | 0.72    | 0.76    | 0.94      |
|  | 255 127 63      | 1.35    | 0.51    | 0.69    | 0.80      |
|  | 255 127 127     | 0.94    | 0.09    | 0.75    | 0.80      |
|  | 255 127 191     | 0.02    | 0.81    | 0.62    | 0.76      |
|  | 255 127 255     | 1.27    | 0.41    | 0.87    | 0.93      |
|  | 255 191 0       | 2.50    | 0.92    | 0.37    | 0.76      |
|  | 255 191 63      | 2.03    | 0.66    | 0.33    | 0.67      |
|  | 255 191 127     | 1.70    | 0.27    | 0.48    | 0.76      |
|  | 255 191 191     | 1.00    | 0.89    | 0.40    | 0.90      |
|  | 255 191 255     | 1.61    | 0.76    | 0.71    | 1.03      |
|  | 255 255 0       | 2.56    | 0.92    | 0.35    | 0.70      |
|  | 255 255 63      | 3.49    | 0.77    | 0.37    | 0.87      |
|  | 255 255 127     | 3.31    | 0.51    | 0.18    | 0.92      |
|  | 255 255 191     | 3.00    | 0.40    | 0.33    | 1.30      |
|  | 255 255 255 (1) | -       | -       | -       | -         |
|  | Average (2)     | 1.57    | 0.89    | 0.42    | 0.86      |
|  | Maximum (2)     | 6.12    | 5.13    | 1.80    | 3.20      |

(1) Visual adaptation to display whitepoint is assumed; CIELAB reference values are adapted (Bradford transformation) to display whitepoint  
(2) Without Black

|             |                         |
|-------------|-------------------------|
| Color Space | Gamut Volume CIELAB D50 |
| sRGB        | 99%                     |

# Colorimetric Report

## Page (5/5)



CCalc 2.3  
Copyright © 2016, Denis Freund  
All Rights Reserved  
lic. for PRAD ProAdviser

|                  |                                         |
|------------------|-----------------------------------------|
| Date             | Friday, April 6, 2018                   |
| Tester           | Oliver Jachmann                         |
| Display          | Iiyama ProLite X3272UHS-B1              |
| Sensor           | X-Rite i1 Display Pro (Corr.: WLED, XR) |
| Testchart        | In accordance with ISO 12646:2007 (1)   |
| Target           | sRGB                                    |
| Display Profile  | Considered                              |
| Rendering Intent | Relative colorimetric                   |

(1) Five equally spaced code values for each channel

| Property             | Device adjustments |
|----------------------|--------------------|
| Backlight brightness |                    |
| Brightness           | 47                 |
| Contrast             | 50                 |
| RGB Gain             | 100 97 100         |
| Gradation            | -                  |
| Other                |                    |