

# Colorimetric Report

## Page (1/4)



CCalc 2.5  
Copyright © 2020, Denis Freund  
All Rights Reserved  
lic. for PRAD ProAdviser

|                  |                                       |
|------------------|---------------------------------------|
| Date             | Thursday, February 17, 2022           |
| Tester           | Damian Köb                            |
| Display          | ASUS VG30VQL1A                        |
| Sensor           | X-Rite i1 Pro                         |
| Testchart        | In accordance with ISO 12646:2007 (1) |
| Target           | Display Profile (Profile Quality)     |
| Display Profile  | Used as target                        |
| Rendering Intent | -                                     |

(1) Five equally spaced code values for each channel

|                                     |                     |
|-------------------------------------|---------------------|
| White Point (CCT)                   | 6507 Kelvin         |
| White Point XYZ (normalized)        | 95.30 100.00 109.41 |
| DeltaE to D50/ D65                  | 19.81/ 0.55         |
| Assumed Target Whitepoint (2)       | 6500 Kelvin         |
| DeltaE to Assumed Target Whitepoint | 0.63                |
| Brightness (3)                      | 142.30 cd/m²        |
| Black Point (3)                     | 0.03 cd/m²          |
| Contrast (x:1)                      | 4743:1              |
| Gradation (Average)                 | 2.18                |

(2) Daylight (3) Measured separately


|  | Percent     | Kelvin | Delta C | Delta E (4) | Gamma |
|--|-------------|--------|---------|-------------|-------|
|  | 5           | -      | -       | -           | -     |
|  | 10          | 6331   | 0.73    | 0.84        | 1.98  |
|  | 15          | 6269   | 0.53    | 0.67        | 2.05  |
|  | 20          | 6471   | 0.47    | 0.82        | 2.08  |
|  | 25          | 6546   | 0.41    | 0.66        | 2.12  |
|  | 30          | 6378   | 2.30    | 2.34        | 2.15  |
|  | 35          | 6418   | 2.10    | 2.10        | 2.20  |
|  | 40          | 6609   | 0.66    | 0.76        | 2.18  |
|  | 45          | 6533   | 0.13    | 0.20        | 2.21  |
|  | 50          | 6597   | 0.68    | 0.71        | 2.21  |
|  | 55          | 6514   | 0.04    | 0.40        | 2.21  |
|  | 60          | 6591   | 0.59    | 0.60        | 2.23  |
|  | 65          | 6580   | 0.60    | 0.61        | 2.24  |
|  | 70          | 6492   | 0.60    | 0.60        | 2.25  |
|  | 75          | 6485   | 0.55    | 0.56        | 2.27  |
|  | 80          | 6474   | 0.51    | 0.51        | 2.26  |
|  | 85          | 6507   | 0.30    | 0.33        | 2.24  |
|  | 90          | 6572   | 0.81    | 0.82        | 2.23  |
|  | 95          | 6574   | 0.91    | 0.92        | 2.21  |
|  | 100 (5)     | 6507   | -       | -           | -     |
|  | Average (6) | -      | 0.72    | 0.8         | 2.18  |
|  | Maximum (6) | -      | 2.3     | 2.34        | -     |
|  | Range (6)   | -      | 2.87    | -           | -     |

(4) Reference: Display Profile; a\*, b\* = 0

(5) Visual adaptation to display whitepoint is assumed

(6) Only luminance > 1% considered

## Corresponding Gamma

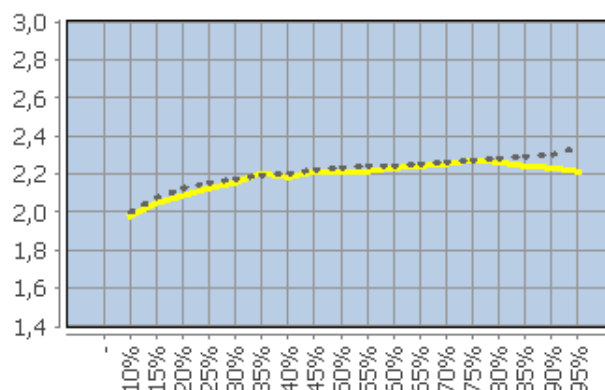

# Colorimetric Report

## Page (2/4)



CCalc 2.5  
Copyright © 2020, Denis Freund  
All Rights Reserved  
lic. for PRAD ProAdviser

|                  |                                       |
|------------------|---------------------------------------|
| Date             | Thursday, February 17, 2022           |
| Tester           | Damian Köb                            |
| Display          | ASUS VG30VQL1A                        |
| Sensor           | X-Rite i1 Pro                         |
| Testchart        | In accordance with ISO 12646:2007 (1) |
| Target           | Display Profile (Profile Quality)     |
| Display Profile  | Used as target                        |
| Rendering Intent | -                                     |

(1) Five equally spaced code values for each channel

|  | RGB        | Delta C | Delta H | Delta L | Delta E94 |
|--|------------|---------|---------|---------|-----------|
|  | 0 0 0      | 0.52    | 0.00    | 0.49    | 0.71      |
|  | 0 0 63     | 0.40    | 0.35    | 0.68    | 0.73      |
|  | 0 0 127    | 0.52    | 1.72    | 1.04    | 1.30      |
|  | 0 0 191    | 0.59    | 2.09    | 1.41    | 1.62      |
|  | 0 0 255    | 2.00    | 0.18    | 0.79    | 0.84      |
|  | 0 63 0     | 0.66    | 2.40    | 0.64    | 1.55      |
|  | 0 63 63    | 1.04    | 0.22    | 0.06    | 0.54      |
|  | 0 63 127   | 1.24    | 0.63    | 0.61    | 0.83      |
|  | 0 63 191   | 0.43    | 0.60    | 1.01    | 1.05      |
|  | 0 63 255   | 2.74    | 1.01    | 0.26    | 0.63      |
|  | 0 127 0    | 1.81    | 3.72    | 0.92    | 1.96      |
|  | 0 127 63   | 0.17    | 2.72    | 0.90    | 1.70      |
|  | 0 127 127  | 1.11    | 0.08    | 0.72    | 0.83      |
|  | 0 127 191  | 0.16    | 0.89    | 0.87    | 1.01      |
|  | 0 127 255  | 1.37    | 1.73    | 0.29    | 0.90      |
|  | 0 191 0    | 1.08    | 3.98    | 0.54    | 1.61      |
|  | 0 191 63   | 0.21    | 3.16    | 0.26    | 1.34      |
|  | 0 191 127  | 1.72    | 0.81    | 0.64    | 0.87      |
|  | 0 191 191  | 1.49    | 0.66    | 0.58    | 0.83      |
|  | 0 191 255  | 0.56    | 2.06    | 0.38    | 1.21      |
|  | 0 255 0    | 0.03    | 0.21    | 0.17    | 0.18      |
|  | 0 255 63   | 1.13    | 1.12    | 0.10    | 0.44      |
|  | 0 255 127  | 0.26    | 0.23    | 0.17    | 0.20      |
|  | 0 255 191  | 0.25    | 0.04    | 0.20    | 0.21      |
|  | 0 255 255  | 0.38    | 1.17    | 0.10    | 0.62      |
|  | 63 0 0     | 1.03    | 0.37    | 0.16    | 0.48      |
|  | 63 0 63    | 0.40    | 0.78    | 0.19    | 0.52      |
|  | 63 0 127   | 0.20    | 1.63    | 1.01    | 1.26      |
|  | 63 0 191   | 0.47    | 2.19    | 0.90    | 1.23      |
|  | 63 0 255   | 1.94    | 0.23    | 0.19    | 0.34      |
|  | 63 63 0    | 1.34    | 1.04    | 0.20    | 0.84      |
|  | 63 63 63   | 0.35    | 0.11    | 0.40    | 0.54      |
|  | 63 63 127  | 1.92    | 0.21    | 0.43    | 0.80      |
|  | 63 63 191  | 1.29    | 0.80    | 0.02    | 0.46      |
|  | 63 63 255  | 3.15    | 0.80    | 0.30    | 0.66      |
|  | 63 127 0   | 2.05    | 2.86    | 0.19    | 1.46      |
|  | 63 127 63  | 1.05    | 2.03    | 0.10    | 1.22      |
|  | 63 127 127 | 0.54    | 0.15    | 0.26    | 0.37      |
|  | 63 127 191 | 0.32    | 0.05    | 0.55    | 0.56      |
|  | 63 127 255 | 2.00    | 1.42    | 0.09    | 0.81      |
|  | 63 191 0   | 1.50    | 3.03    | 0.24    | 1.24      |
|  | 63 191 63  | 0.92    | 2.69    | 0.14    | 1.18      |
|  | 63 191 127 | 0.59    | 0.66    | 0.11    | 0.39      |
|  | 63 191 191 | 0.88    | 0.61    | 0.09    | 0.48      |
|  | 63 191 255 | 0.19    | 1.54    | 0.24    | 0.91      |
|  | 63 255 0   | 0.41    | 0.59    | 0.02    | 0.21      |
|  | 63 255 63  | 2.20    | 0.66    | 0.04    | 0.42      |

# Colorimetric Report

## Page (3/4)



CCalc 2.5  
Copyright © 2020, Denis Freund  
All Rights Reserved  
lic. for PRAD ProAdviser

|                  |                                       |
|------------------|---------------------------------------|
| Date             | Thursday, February 17, 2022           |
| Tester           | Damian Köb                            |
| Display          | ASUS VG30VQL1A                        |
| Sensor           | X-Rite i1 Pro                         |
| Testchart        | In accordance with ISO 12646:2007 (1) |
| Target           | Display Profile (Profile Quality)     |
| Display Profile  | Used as target                        |
| Rendering Intent | -                                     |

(1) Five equally spaced code values for each channel

|  | RGB         | Delta C | Delta H | Delta L | Delta E94 |
|--|-------------|---------|---------|---------|-----------|
|  | 63 255 127  | 1.01    | 0.13    | 0.07    | 0.21      |
|  | 63 255 191  | 0.99    | 0.22    | 0.23    | 0.34      |
|  | 63 255 255  | 0.16    | 1.55    | 0.05    | 0.83      |
|  | 127 0 0     | 1.93    | 1.16    | 0.51    | 0.89      |
|  | 127 0 63    | 0.14    | 0.07    | 0.07    | 0.09      |
|  | 127 0 127   | 0.17    | 1.07    | 0.65    | 0.83      |
|  | 127 0 191   | 0.17    | 1.64    | 0.68    | 0.94      |
|  | 127 0 255   | 1.42    | 0.13    | 0.29    | 0.36      |
|  | 127 63 0    | 3.35    | 0.28    | 0.10    | 0.92      |
|  | 127 63 63   | 1.26    | 0.40    | 0.37    | 0.66      |
|  | 127 63 127  | 1.40    | 0.62    | 0.05    | 0.57      |
|  | 127 63 191  | 1.26    | 0.61    | 0.39    | 0.55      |
|  | 127 63 255  | 2.45    | 0.41    | 0.18    | 0.47      |
|  | 127 127 0   | 4.10    | 1.92    | 0.56    | 1.50      |
|  | 127 127 63  | 2.34    | 1.10    | 0.08    | 1.09      |
|  | 127 127 127 | 0.64    | 0.15    | 0.28    | 0.72      |
|  | 127 127 191 | 0.44    | 0.20    | 0.37    | 0.42      |
|  | 127 127 255 | 2.44    | 0.99    | 0.03    | 0.73      |
|  | 127 191 0   | 2.30    | 2.59    | 0.12    | 1.16      |
|  | 127 191 63  | 1.74    | 2.35    | 0.02    | 1.16      |
|  | 127 191 127 | 0.24    | 1.30    | 0.08    | 0.78      |
|  | 127 191 191 | 0.83    | 0.62    | 0.19    | 0.62      |
|  | 127 191 255 | 0.29    | 1.46    | 0.08    | 0.91      |
|  | 127 255 0   | 0.27    | 0.14    | 0.14    | 0.15      |
|  | 127 255 63  | 2.60    | 0.39    | 0.07    | 0.46      |
|  | 127 255 127 | 0.95    | 0.10    | 0.07    | 0.21      |
|  | 127 255 191 | 1.09    | 0.30    | 0.12    | 0.35      |
|  | 127 255 255 | 0.47    | 0.69    | 0.02    | 0.44      |
|  | 191 0 0     | 0.96    | 1.18    | 0.14    | 0.52      |
|  | 191 0 63    | 0.14    | 0.37    | 0.01    | 0.17      |
|  | 191 0 127   | 0.38    | 1.32    | 0.06    | 0.60      |
|  | 191 0 191   | 0.10    | 1.64    | 0.41    | 0.77      |
|  | 191 0 255   | 1.63    | 1.32    | 0.11    | 0.53      |
|  | 191 63 0    | 2.15    | 1.57    | 0.14    | 0.80      |
|  | 191 63 63   | 0.89    | 0.71    | 0.60    | 0.73      |
|  | 191 63 127  | 0.14    | 0.84    | 0.26    | 0.50      |
|  | 191 63 191  | 0.94    | 1.32    | 0.02    | 0.62      |
|  | 191 63 255  | 2.64    | 1.14    | 0.48    | 0.78      |
|  | 191 127 0   | 3.48    | 1.46    | 0.10    | 1.00      |
|  | 191 127 63  | 1.97    | 0.93    | 0.15    | 0.77      |
|  | 191 127 127 | 0.39    | 0.85    | 0.05    | 0.60      |
|  | 191 127 191 | 0.71    | 0.95    | 0.05    | 0.61      |
|  | 191 127 255 | 1.56    | 0.55    | 0.36    | 0.57      |
|  | 191 191 0   | 2.59    | 1.32    | 0.20    | 0.78      |
|  | 191 191 63  | 3.16    | 0.84    | 0.20    | 0.88      |
|  | 191 191 127 | 0.97    | 0.41    | 0.09    | 0.46      |
|  | 191 191 191 | 0.49    | 0.17    | 0.14    | 0.54      |

# Colorimetric Report

## Page (4/4)



CCalc 2.5  
Copyright © 2020, Denis Freund  
All Rights Reserved  
lic. for PRAD ProAdviser

|                  |                                       |
|------------------|---------------------------------------|
| Date             | Thursday, February 17, 2022           |
| Tester           | Damian Köb                            |
| Display          | ASUS VG30VQL1A                        |
| Sensor           | X-Rite i1 Pro                         |
| Testchart        | In accordance with ISO 12646:2007 (1) |
| Target           | Display Profile (Profile Quality)     |
| Display Profile  | Used as target                        |
| Rendering Intent | -                                     |

(1) Five equally spaced code values for each channel

|  | RGB             | Delta C | Delta H | Delta L | Delta E94 |
|--|-----------------|---------|---------|---------|-----------|
|  | 191 191 255     | 1.68    | 0.54    | 0.16    | 0.75      |
|  | 191 255 0       | 0.57    | 0.65    | 0.04    | 0.26      |
|  | 191 255 63      | 2.09    | 0.18    | 0.05    | 0.38      |
|  | 191 255 127     | 2.12    | 0.39    | 0.03    | 0.53      |
|  | 191 255 191     | 0.68    | 0.84    | 0.06    | 0.56      |
|  | 191 255 255     | 1.14    | 0.44    | 0.13    | 0.63      |
|  | 255 0 0         | 0.86    | 0.23    | 0.37    | 0.40      |
|  | 255 0 63        | 0.87    | 0.73    | 0.53    | 0.62      |
|  | 255 0 127       | 0.00    | 0.08    | 0.62    | 0.62      |
|  | 255 0 191       | 0.03    | 0.78    | 0.70    | 0.76      |
|  | 255 0 255       | 1.04    | 0.07    | 0.53    | 0.56      |
|  | 255 63 0        | 2.65    | 0.40    | 0.02    | 0.44      |
|  | 255 63 63       | 2.22    | 0.79    | 0.06    | 0.53      |
|  | 255 63 127      | 1.67    | 0.34    | 0.04    | 0.38      |
|  | 255 63 191      | 1.23    | 0.60    | 0.06    | 0.35      |
|  | 255 63 255      | 2.53    | 0.19    | 0.15    | 0.44      |
|  | 255 127 0       | 3.08    | 0.10    | 0.08    | 0.54      |
|  | 255 127 63      | 3.32    | 1.01    | 0.08    | 0.83      |
|  | 255 127 127     | 2.06    | 0.04    | 0.04    | 0.54      |
|  | 255 127 191     | 1.17    | 0.09    | 0.07    | 0.31      |
|  | 255 127 255     | 2.79    | 0.36    | 0.09    | 0.61      |
|  | 255 191 0       | 3.00    | 1.21    | 0.08    | 0.73      |
|  | 255 191 63      | 3.74    | 1.20    | 0.10    | 0.96      |
|  | 255 191 127     | 2.54    | 0.11    | 0.00    | 0.78      |
|  | 255 191 191     | 1.73    | 0.67    | 0.03    | 0.88      |
|  | 255 191 255     | 2.04    | 0.49    | 0.28    | 0.80      |
|  | 255 255 0       | 0.04    | 0.09    | 0.08    | 0.09      |
|  | 255 255 63      | 2.58    | 0.58    | 0.13    | 0.54      |
|  | 255 255 127     | 1.95    | 0.16    | 0.07    | 0.49      |
|  | 255 255 191     | 1.13    | 0.05    | 0.16    | 0.47      |
|  | 255 255 255 (1) | -       | -       | -       | -         |
|  | Average (2)     | 1.30    | 0.90    | 0.27    | 0.70      |
|  | Maximum (2)     | 4.10    | 3.98    | 1.41    | 1.96      |

(1) Visual adaptation to display whitepoint is assumed; CIELAB reference values are adapted (Bradford transformation) to display whitepoint  
(2) Without Black

| Color Space              | Gamut Volume CIELAB D50 |
|--------------------------|-------------------------|
| sRGB                     | 99%                     |
| AdobeRGB                 | 80%                     |
| ECI-RGB v2               | 73%                     |
| DCI-P3 RGB               | 87%                     |
| ISO Coated v2 (FOGRA39L) | 93%                     |