

# Colorimetric Report

## Page (1/4)



CCalc 2.5  
Copyright © 2020, Denis Freund  
All Rights Reserved  
lic. for PRAD ProAdviser

|                  |                                       |
|------------------|---------------------------------------|
| Date             | Saturday, October 1, 2022             |
| Tester           | Denis Freund                          |
| Display          | ASUS ProArt PA32DC                    |
| Sensor           | X-Rite i1 Pro                         |
| Testchart        | In accordance with ISO 12646:2007 (1) |
| Target           | sRGB                                  |
| Display Profile  | Not considered                        |
| Rendering Intent | -                                     |

(1) Five equally spaced code values for each channel


|                                     |                     |
|-------------------------------------|---------------------|
| White Point (CCT)                   | 6379 Kelvin         |
| White Point XYZ (normalized)        | 93.03 100.00 103.28 |
| DeltaE to D50/ D65                  | 16.63/ 4.99         |
| Assumed Target Whitepoint (2)       | 6400 Kelvin         |
| DeltaE to Assumed Target Whitepoint | 4.35                |
| Brightness (3)                      | -                   |
| Black Point (3)                     | -                   |
| Contrast (x:1)                      | 801:1               |
| Gradation (Average)                 | 2.21                |

(2) Daylight (3) Measured separately

|  | Percent     | Kelvin | Delta C | Delta E | Gamma |
|--|-------------|--------|---------|---------|-------|
|  | 5           | -      | -       | -       | -     |
|  | 10          | 6425   | 0.25    | 3.22    | 2.19  |
|  | 15          | 6147   | 0.56    | 2.54    | 2.20  |
|  | 20          | 6211   | 0.47    | 1.87    | 2.21  |
|  | 25          | 6246   | 0.58    | 1.37    | 2.21  |
|  | 30          | 6283   | 0.45    | 0.86    | 2.21  |
|  | 35          | 6321   | 0.45    | 0.61    | 2.21  |
|  | 40          | 6342   | 0.43    | 0.43    | 2.21  |
|  | 45          | 6323   | 0.49    | 0.49    | 2.21  |
|  | 50          | 6296   | 0.66    | 0.73    | 2.20  |
|  | 55          | 6308   | 0.44    | 0.54    | 2.21  |
|  | 60          | 6290   | 0.62    | 0.71    | 2.21  |
|  | 65          | 6299   | 0.58    | 0.69    | 2.22  |
|  | 70          | 6337   | 0.40    | 0.61    | 2.21  |
|  | 75          | 6345   | 0.56    | 0.82    | 2.19  |
|  | 80          | 6351   | 0.23    | 0.47    | 2.20  |
|  | 85          | 6361   | 0.21    | 0.35    | 2.21  |
|  | 90          | 6341   | 0.45    | 0.46    | 2.24  |
|  | 95          | 6340   | 0.40    | 0.40    | 2.23  |
|  | 100 (4)     | 6380   | -       | -       | -     |
|  | Average (5) | -      | 0.47    | 0.82    | 2.21  |
|  | Maximum (5) | -      | 0.66    | 2.54    | -     |
|  | Range (5)   | -      | 0.66    | -       | -     |

(4) Visual adaptation to display whitepoint is assumed  
(5) Only luminance > 1% considered

### Corresponding Gamma

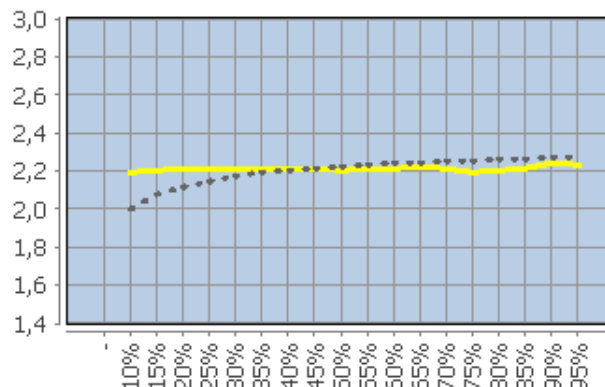

# Colorimetric Report

## Page (2/4)



CCalc 2.5  
Copyright © 2020, Denis Freund  
All Rights Reserved  
lic. for PRAD ProAdviser

|                  |                                       |
|------------------|---------------------------------------|
| Date             | Saturday, October 1, 2022             |
| Tester           | Denis Freund                          |
| Display          | ASUS ProArt PA32DC                    |
| Sensor           | X-Rite i1 Pro                         |
| Testchart        | In accordance with ISO 12646:2007 (1) |
| Target           | sRGB                                  |
| Display Profile  | Not considered                        |
| Rendering Intent | -                                     |

(1) Five equally spaced code values for each channel

|  | RGB        | Delta C | Delta H | Delta L | Delta E94 |
|--|------------|---------|---------|---------|-----------|
|  | 0 0 0      | 0.13    | 0.00    | 0.09    | 0.15      |
|  | 0 0 63     | 4.68    | 3.21    | 0.17    | 2.51      |
|  | 0 0 127    | 5.42    | 4.07    | 1.14    | 2.48      |
|  | 0 0 191    | 6.01    | 4.54    | 1.55    | 2.55      |
|  | 0 0 255    | 7.76    | 5.50    | 1.67    | 2.71      |
|  | 0 63 0     | 4.23    | 1.67    | 1.46    | 2.28      |
|  | 0 63 63    | 1.37    | 0.78    | 0.69    | 1.19      |
|  | 0 63 127   | 0.22    | 0.92    | 0.27    | 0.63      |
|  | 0 63 191   | 0.81    | 1.87    | 0.06    | 0.87      |
|  | 0 63 255   | 4.05    | 3.73    | 0.77    | 1.72      |
|  | 0 127 0    | 1.11    | 2.28    | 0.41    | 1.20      |
|  | 0 127 63   | 0.14    | 2.49    | 0.38    | 1.44      |
|  | 0 127 127  | 1.05    | 0.07    | 0.37    | 0.58      |
|  | 0 127 191  | 0.75    | 1.12    | 0.74    | 1.04      |
|  | 0 127 255  | 1.84    | 2.47    | 0.91    | 1.55      |
|  | 0 191 0    | 1.66    | 3.08    | 0.42    | 1.36      |
|  | 0 191 63   | 1.17    | 3.10    | 0.39    | 1.45      |
|  | 0 191 127  | 2.35    | 1.77    | 0.41    | 1.20      |
|  | 0 191 191  | 0.83    | 1.15    | 0.85    | 1.15      |
|  | 0 191 255  | 0.54    | 0.53    | 0.65    | 0.75      |
|  | 0 255 0    | 1.81    | 3.77    | 0.22    | 1.40      |
|  | 0 255 63   | 1.57    | 3.76    | 0.19    | 1.45      |
|  | 0 255 127  | 3.14    | 2.41    | 0.30    | 1.24      |
|  | 0 255 191  | 3.16    | 0.49    | 0.16    | 0.84      |
|  | 0 255 255  | 1.37    | 0.13    | 0.54    | 0.69      |
|  | 63 0 0     | 2.60    | 1.20    | 1.26    | 1.83      |
|  | 63 0 63    | 3.46    | 0.93    | 1.10    | 1.72      |
|  | 63 0 127   | 3.72    | 3.24    | 0.21    | 1.77      |
|  | 63 0 191   | 5.12    | 4.32    | 0.96    | 2.14      |
|  | 63 0 255   | 6.73    | 5.24    | 1.08    | 2.29      |
|  | 63 63 0    | 1.60    | 0.79    | 1.23    | 1.47      |
|  | 63 63 63   | 0.54    | 0.06    | 1.26    | 1.37      |
|  | 63 63 127  | 0.06    | 1.24    | 0.68    | 1.03      |
|  | 63 63 191  | 1.62    | 2.52    | 0.09    | 1.22      |
|  | 63 63 255  | 3.62    | 3.69    | 0.34    | 1.54      |
|  | 63 127 0   | 0.24    | 1.41    | 0.14    | 0.73      |
|  | 63 127 63  | 1.17    | 1.67    | 0.08    | 1.08      |
|  | 63 127 127 | 0.50    | 0.16    | 0.14    | 0.32      |
|  | 63 127 191 | 0.52    | 1.49    | 0.52    | 1.09      |
|  | 63 127 255 | 1.65    | 2.54    | 0.66    | 1.43      |
|  | 63 191 0   | 0.72    | 2.63    | 0.25    | 1.14      |
|  | 63 191 63  | 0.31    | 2.60    | 0.22    | 1.21      |
|  | 63 191 127 | 1.60    | 1.73    | 0.30    | 1.10      |
|  | 63 191 191 | 0.63    | 1.20    | 0.71    | 1.09      |
|  | 63 191 255 | 0.86    | 1.94    | 0.98    | 1.55      |
|  | 63 255 0   | 1.55    | 3.70    | 0.14    | 1.37      |
|  | 63 255 63  | 1.41    | 3.65    | 0.16    | 1.42      |

# Colorimetric Report

## Page (3/4)



CCalc 2.5  
Copyright © 2020, Denis Freund  
All Rights Reserved  
lic. for PRAD ProAdviser

|                  |                                       |
|------------------|---------------------------------------|
| Date             | Saturday, October 1, 2022             |
| Tester           | Denis Freund                          |
| Display          | ASUS ProArt PA32DC                    |
| Sensor           | X-Rite i1 Pro                         |
| Testchart        | In accordance with ISO 12646:2007 (1) |
| Target           | sRGB                                  |
| Display Profile  | Not considered                        |
| Rendering Intent | -                                     |

(1) Five equally spaced code values for each channel

|  | RGB         | Delta C | Delta H | Delta L | Delta E94 |
|--|-------------|---------|---------|---------|-----------|
|  | 63 255 127  | 2.42    | 1.75    | 0.13    | 0.91      |
|  | 63 255 191  | 3.05    | 0.46    | 0.08    | 0.83      |
|  | 63 255 255  | 1.30    | 0.24    | 0.44    | 0.62      |
|  | 127 0 0     | 1.82    | 0.72    | 0.89    | 1.08      |
|  | 127 0 63    | 2.07    | 1.25    | 0.79    | 1.23      |
|  | 127 0 127   | 2.72    | 1.26    | 0.16    | 0.92      |
|  | 127 0 191   | 3.81    | 2.74    | 0.39    | 1.38      |
|  | 127 0 255   | 5.97    | 4.05    | 0.72    | 1.82      |
|  | 127 63 0    | 0.98    | 2.06    | 1.37    | 1.83      |
|  | 127 63 63   | 0.92    | 0.77    | 0.76    | 1.01      |
|  | 127 63 127  | 0.69    | 0.98    | 0.76    | 0.99      |
|  | 127 63 191  | 1.47    | 1.68    | 0.12    | 0.86      |
|  | 127 63 255  | 4.01    | 3.13    | 0.36    | 1.42      |
|  | 127 127 0   | 0.24    | 1.14    | 0.31    | 0.69      |
|  | 127 127 63  | 1.77    | 1.00    | 0.33    | 0.99      |
|  | 127 127 127 | 0.54    | 0.09    | 0.26    | 0.60      |
|  | 127 127 191 | 1.56    | 1.09    | 0.63    | 1.11      |
|  | 127 127 255 | 2.44    | 2.22    | 0.72    | 1.41      |
|  | 127 191 0   | 0.35    | 2.46    | 0.06    | 1.10      |
|  | 127 191 63  | 0.57    | 2.61    | 0.01    | 1.29      |
|  | 127 191 127 | 0.28    | 1.85    | 0.56    | 1.27      |
|  | 127 191 191 | 0.29    | 0.01    | 0.44    | 0.46      |
|  | 127 191 255 | 0.87    | 1.76    | 0.71    | 1.36      |
|  | 127 255 0   | 1.59    | 3.89    | 0.11    | 1.50      |
|  | 127 255 63  | 0.71    | 4.16    | 0.04    | 1.67      |
|  | 127 255 127 | 2.35    | 2.54    | 0.05    | 1.28      |
|  | 127 255 191 | 2.32    | 1.25    | 0.42    | 1.06      |
|  | 127 255 255 | 1.29    | 0.35    | 0.28    | 0.60      |
|  | 191 0 0     | 2.25    | 0.59    | 1.01    | 1.14      |
|  | 191 0 63    | 0.59    | 1.17    | 0.74    | 0.95      |
|  | 191 0 127   | 2.06    | 0.85    | 0.52    | 0.82      |
|  | 191 0 191   | 3.34    | 2.09    | 0.24    | 1.11      |
|  | 191 0 255   | 4.61    | 2.70    | 0.00    | 1.21      |
|  | 191 63 0    | 0.56    | 1.33    | 1.05    | 1.23      |
|  | 191 63 63   | 0.71    | 0.61    | 1.11    | 1.18      |
|  | 191 63 127  | 0.81    | 0.81    | 0.79    | 0.93      |
|  | 191 63 191  | 1.49    | 1.65    | 0.21    | 0.85      |
|  | 191 63 255  | 2.72    | 2.35    | 0.13    | 1.03      |
|  | 191 127 0   | 0.63    | 0.46    | 0.18    | 0.33      |
|  | 191 127 63  | 1.00    | 1.43    | 0.27    | 0.93      |
|  | 191 127 127 | 0.24    | 0.09    | 0.04    | 0.13      |
|  | 191 127 191 | 2.07    | 0.75    | 0.12    | 0.86      |
|  | 191 127 255 | 2.64    | 1.74    | 0.33    | 1.08      |
|  | 191 191 0   | 0.39    | 1.26    | 0.06    | 0.59      |
|  | 191 191 63  | 1.00    | 1.03    | 0.07    | 0.59      |
|  | 191 191 127 | 0.18    | 1.50    | 0.17    | 1.01      |
|  | 191 191 191 | 0.46    | 0.11    | 0.49    | 0.68      |

# Colorimetric Report

## Page (4/4)



CCalc 2.5  
Copyright © 2020, Denis Freund  
All Rights Reserved  
lic. for PRAD ProAdviser

|                  |                                       |
|------------------|---------------------------------------|
| Date             | Saturday, October 1, 2022             |
| Tester           | Denis Freund                          |
| Display          | ASUS ProArt PA32DC                    |
| Sensor           | X-Rite i1 Pro                         |
| Testchart        | In accordance with ISO 12646:2007 (1) |
| Target           | sRGB                                  |
| Display Profile  | Not considered                        |
| Rendering Intent | -                                     |

(1) Five equally spaced code values for each channel

|  | RGB             | Delta C | Delta H | Delta L | Delta E94 |
|--|-----------------|---------|---------|---------|-----------|
|  | 191 191 255     | 2.06    | 1.02    | 0.74    | 1.29      |
|  | 191 255 0       | 0.12    | 3.18    | 0.18    | 1.28      |
|  | 191 255 63      | 0.76    | 3.29    | 0.18    | 1.41      |
|  | 191 255 127     | 1.02    | 1.95    | 0.19    | 1.02      |
|  | 191 255 191     | 1.19    | 1.07    | 0.05    | 0.79      |
|  | 191 255 255     | 0.48    | 0.56    | 0.50    | 0.70      |
|  | 255 0 0         | 1.62    | 0.67    | 1.32    | 1.37      |
|  | 255 0 63        | 0.99    | 0.41    | 1.24    | 1.27      |
|  | 255 0 127       | 2.13    | 1.21    | 1.07    | 1.27      |
|  | 255 0 191       | 2.41    | 1.48    | 0.61    | 0.97      |
|  | 255 0 255       | 3.51    | 2.63    | 0.42    | 1.19      |
|  | 255 63 0        | 0.29    | 0.83    | 1.41    | 1.45      |
|  | 255 63 63       | 0.74    | 0.11    | 1.15    | 1.16      |
|  | 255 63 127      | 1.06    | 1.12    | 1.26    | 1.39      |
|  | 255 63 191      | 1.47    | 1.34    | 0.71    | 0.97      |
|  | 255 63 255      | 2.50    | 2.29    | 0.58    | 1.15      |
|  | 255 127 0       | 1.33    | 1.08    | 0.62    | 0.82      |
|  | 255 127 63      | 0.47    | 1.77    | 0.56    | 1.03      |
|  | 255 127 127     | 1.10    | 0.02    | 0.28    | 0.43      |
|  | 255 127 191     | 2.20    | 0.89    | 0.21    | 0.81      |
|  | 255 127 255     | 2.31    | 1.65    | 0.14    | 0.93      |
|  | 255 191 0       | 0.86    | 0.29    | 0.25    | 0.33      |
|  | 255 191 63      | 1.30    | 0.57    | 0.27    | 0.50      |
|  | 255 191 127     | 0.32    | 0.66    | 0.20    | 0.46      |
|  | 255 191 191     | 0.90    | 0.15    | 0.13    | 0.46      |
|  | 255 191 255     | 2.15    | 1.25    | 0.29    | 1.13      |
|  | 255 255 0       | 0.18    | 1.78    | 0.38    | 0.82      |
|  | 255 255 63      | 0.28    | 1.67    | 0.44    | 0.85      |
|  | 255 255 127     | 0.16    | 1.24    | 0.14    | 0.65      |
|  | 255 255 191     | 0.40    | 0.68    | 0.10    | 0.50      |
|  | 255 255 255 (1) | -       | -       | -       | -         |
|  | Average (2)     | 1.69    | 1.69    | 0.50    | 1.14      |
|  | Maximum (2)     | 7.76    | 5.50    | 1.67    | 2.71      |

(1) Visual adaptation to display whitepoint is assumed; CIELAB reference values are adapted (Bradford transformation) to display whitepoint  
(2) Without Black

|             |                         |
|-------------|-------------------------|
| Color Space | Gamut Volume CIELAB D50 |
| sRGB        | 94%                     |