

Colorimetric Report

Page (1/5)

CCalc 2.0

Copyright © 2011, Denis Freund
All Rights Reserved
licensed for PRAD ProAdviser

Test Device	BenQ_BL2410PT
Target	sRGB
Display Profile	considered
Rendering Intent	Relative colorimetric


White Point / CCT Kelvin	6159K
White Point XYZ (normalized)	96.21 100.0 105.45
DeltaE to D50/ D65	17.04/ 2.94
DeltaE to Blackbody Curve *	2.27
Assumed Target Whitepoint	6200K
DeltaE to Assumed Target Whitepoint	2.08
Brightness / cd/m ² **	140.3
Black Point / cd/m ² **	0.038
Contrast / x:1	3692:1
Gradation (Average)	2.23

* Based on CCT ** Measured with X-Rite DTP94 or comparable probe

	Percent	Kelvin	deltaC	deltaE	Gamma
	5	-	-	-	-
	10	6024	0.63	0.72	2.04
	15	6098	0.56	0.57	2.07
	20	6029	0.4	0.59	2.14
	25	6035	0.44	0.56	2.17
	30	6137	1.2	1.28	2.21
	35	6050	0.57	0.77	2.21
	40	6114	0.32	0.43	2.22
	45	6110	0.49	0.6	2.24
	50	6156	0.95	1.02	2.26
	55	6172	0.79	1.04	2.27
	60	6122	0.9	1.0	2.27
	65	6170	0.89	0.93	2.28
	70	6114	0.38	0.53	2.31
	75	6142	0.34	0.44	2.28
	80	6162	0.67	0.69	2.29
	85	6168	0.94	0.94	2.29
	90	6157	0.37	0.41	2.26
	95	6160	0.75	0.76	2.3
	100	6159	-	-	-
	Average	-	0.64*	0.74*	2.23
	Maximum	-	1.2*	1.28*	-
	Range	-	1.38*	-	-

* Only luminance > 1% considered
Without Black Point Compensation

Corresponding Gamma

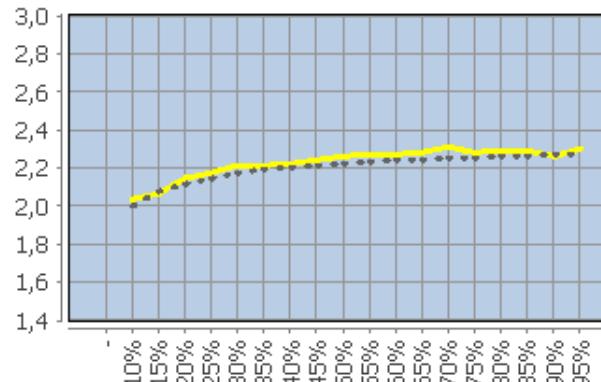

Colorimetric Report

Page (2/5)

CCalc 2.0

 Copyright © 2011, Denis Freund
 All Rights Reserved
 licensed for PRAD ProAdviser

Test Device	BenQ_BL2410PT				
Target	sRGB				
Display Profile	considered				
Rendering Intent	Relative colorimetric				

	RGB	deltaC	deltaH	deltaL	deltaE94
	255 0 0	0.41	0.95	0.75	0.84
	0 255 0	2.75	0.91	0.42	0.68
	0 0 255	4.6	2.3	0.51	1.13
	0 255 255	0.33	0.05	0.15	0.18
	255 0 255	2.87	1.55	0.93	1.18
	255 255 0	2.19	0.96	0.16	0.59
	170 85 85	0.77	0.08	0.35	0.45
	85 170 85	0.94	1.37	0.88	1.18
	85 85 170	0.03	1.01	0.51	0.76
	85 170 170	0.09	1.27	0.87	1.25
	170 85 170	0.1	1.0	0.22	0.59
	170 170 85	1.52	0.36	0.28	0.61
	229 0 0	0.61	1.25	0.7	0.88
	204 0 0	1.25	1.69	0.72	1.06
	178 0 0	1.25	1.95	0.59	1.1
	153 0 0	1.56	2.35	0.36	1.25
	127 0 0	0.79	2.72	0.02	1.44
	102 0 0	0.1	3.29	0.36	1.9
	76 0 0	0.21	3.15	0.83	2.16
	0 229 0	1.63	2.68	0.69	1.26
	0 204 0	0.92	3.31	0.63	1.47
	0 178 0	0.63	3.3	0.77	1.6
	0 153 0	0.98	3.41	1.01	1.85
	0 127 0	0.8	2.74	1.16	1.77
	0 102 0	0.55	1.98	0.76	1.29
	0 76 0	0.23	1.71	1.16	1.52
	0 0 229	2.92	0.87	0.38	0.66
	0 0 204	2.5	0.17	0.78	0.88
	0 0 178	2.86	0.11	1.16	1.27
	0 0 153	3.09	0.31	1.15	1.31
	0 0 127	4.0	0.34	1.17	1.47
	0 0 102	3.62	0.22	1.12	1.43
	0 0 76	5.22	0.79	0.81	1.79
	0 229 229	0.69	0.59	0.57	0.7
	0 204 204	0.82	0.98	0.9	1.12
	0 178 178	1.25	0.01	0.79	0.91
	0 153 153	0.65	1.04	0.98	1.22
	0 127 127	0.37	1.22	1.26	1.52
	0 102 102	0.76	0.37	0.78	0.9
	0 76 76	0.22	1.13	1.15	1.44
	229 0 229	1.53	1.54	0.65	0.92
	204 0 204	1.07	1.84	0.32	0.84
	178 0 178	0.79	1.77	0.32	0.84
	153 0 153	0.4	2.0	0.03	0.92
	127 0 127	0.39	2.31	0.15	1.15
	102 0 102	0.72	1.91	0.41	1.11
	76 0 76	0.5	1.77	0.55	1.18

Colorimetric Report

Page (3/5)

Test Device	BenQ_BL2410PT
Target	sRGB
Display Profile	considered
Rendering Intent	Relative colorimetric

	RGB	deltaC	deltaH	deltaL	deltaE94
	229 229 0	2.66	0.49	0.1	0.58
	204 204 0	3.33	0.07	0.18	0.73
	178 178 0	3.61	0.18	0.1	0.84
	153 153 0	3.79	0.15	0.33	1.01
	127 127 0	2.82	0.41	0.44	0.92
	102 102 0	1.72	0.16	0.32	0.63
	76 76 0	0.83	0.15	0.72	0.78
	255 25 25	0.07	0.63	0.7	0.74
	255 51 51	0.34	1.36	0.66	0.88
	255 76 76	0.47	1.77	0.97	1.27
	255 102 102	0.03	1.73	0.8	1.18
	255 127 127	0.61	1.32	0.47	0.88
	255 153 153	0.03	1.26	0.38	0.86
	255 178 178	0.71	1.24	0.3	0.95
	255 204 204	0.59	0.3	0.2	0.44
	255 229 229	1.3	0.28	0.15	0.96
	25 255 25	2.64	0.85	0.39	0.65
	51 255 51	3.24	1.05	0.41	0.78
	76 255 76	3.43	0.89	0.38	0.8
	102 255 102	3.59	0.83	0.45	0.9
	127 255 127	3.04	0.07	0.05	0.67
	153 255 153	3.03	0.01	0.16	0.8
	178 255 178	2.85	0.27	0.22	0.94
	204 255 204	2.29	0.65	0.08	1.04
	229 255 229	1.79	0.58	0.07	1.14
	25 25 255	3.62	1.67	0.56	0.96
	51 51 255	2.91	1.47	0.38	0.8
	76 76 255	1.97	0.72	0.16	0.47
	102 102 255	2.21	0.78	0.29	0.63
	127 127 255	1.25	0.65	0.04	0.43
	153 153 255	1.11	0.3	0.02	0.36
	178 178 255	1.21	0.37	0.17	0.51
	204 204 255	0.54	0.44	0.1	0.41
	229 229 255	0.42	0.31	0.1	0.38
	25 255 255	0.46	0.09	0.12	0.19
	51 255 255	0.3	0.12	0.15	0.19
	76 255 255	0.48	0.09	0.18	0.24
	102 255 255	0.55	0.12	0.19	0.28
	127 255 255	0.77	0.34	0.14	0.39
	153 255 255	0.72	0.58	0.12	0.51
	178 255 255	0.89	0.79	0.02	0.72
	204 255 255	0.98	0.37	0.27	0.69
	229 255 255	1.3	0.37	0.15	1.0

Colorimetric Report

Page (4/5)



CCalc 2.0

Copyright © 2011, Denis Freund
All Rights Reserved
licensed for PRAD ProAdviser

Test Device	BenQ_BL2410PT				
Target	sRGB				
Display Profile	considered				
Rendering Intent	Relative colorimetric				

	RGB	deltaC	deltaH	deltaL	deltaE94
	255 25 255	3.3	1.45	1.02	1.27
	255 51 255	3.11	1.16	0.99	1.21
	255 76 255	2.97	0.9	0.89	1.1
	255 102 255	3.59	1.05	1.06	1.35
	255 127 255	2.59	0.98	0.69	1.0
	255 153 255	2.71	0.4	0.63	0.97
	255 178 255	1.89	0.27	0.35	0.71
	255 204 255	1.74	0.55	0.01	0.8
	255 229 255	1.87	0.97	0.01	1.33
	255 255 25	2.33	0.9	0.14	0.59
	255 255 51	2.64	0.9	0.13	0.66
	255 255 76	2.88	0.87	0.13	0.73
	255 255 102	2.71	0.94	0.13	0.78
	255 255 127	2.45	0.89	0.13	0.8
	255 255 153	2.28	0.97	0.14	0.9
	255 255 178	1.56	0.84	0.16	0.8
	255 255 204	1.62	0.82	0.11	0.96
	255 255 229	0.52	0.48	0.12	0.53
	213 255 0	3.3	1.45	0.02	0.84
	159 191 0	3.45	0.67	0.41	0.91
	106 128 0	2.56	1.04	0.5	1.02
	0 255 85	3.17	1.34	0.36	0.84
	0 191 64	0.15	2.8	0.68	1.42
	0 128 42	0.13	2.58	0.88	1.6
	0 128 255	0.11	1.06	0.57	0.76
	0 96 191	0.06	0.17	0.89	0.9
	0 64 128	0.07	0.16	1.07	1.08
	170 0 255	2.94	0.34	0.79	0.92
	127 0 191	0.75	1.67	0.27	0.75
	85 0 128	0.71	2.43	0.62	1.33
	255 0 42	0.2	0.75	0.76	0.82
	191 0 32	0.19	0.95	0.61	0.76
	128 0 21	0.6	1.38	0.02	0.77
	170 85 0	1.67	1.47	0.29	0.92
	0 170 85	0.31	2.17	0.94	1.45
	85 0 170	0.61	1.76	0.64	0.98
	0 85 170	0.44	0.43	1.01	1.05
	170 0 85	0.58	1.73	0.45	1.01
	85 170 0	2.56	2.38	0.84	1.48
	123 127 127	0.11	0.34	0.47	0.59
	127 123 127	0.98	0.22	0.62	1.08
	127 127 123	0.23	0.25	0.54	0.63
	Average	1.53	1.06	0.49	0.94
	Maximum	5.22	3.41	1.26	2.16

Colorimetric Report

Page (5/5)



CCalc 2.0

Copyright © 2011, Denis Freund
All Rights Reserved
licensed for PRAD ProAdviser

Test Device	BenQ_BL2410PT
Target	sRGB
Display Profile	considered
Rendering Intent	Relative colorimetric

Property	Device adjustments
Backlight brightness	
Brightness	37
Contrast	50
RGB Gain	100 100 96
Gradation	G2
Other	Benutzermodus iColor 3.8.5 mit i1D3