

# Colorimetric Report

## Page (1/4)



CCalc 2.1  
 Copyright © 2014, Denis Freund  
 All Rights Reserved  
 licensed for PRAD ProAdviser

Date	Wednesday, December 3, 2014
Display	LG 31MU97-B
Sensor	X-Rite i1 Pro
Testchart	In accordance with ISO 12646:2007 (1)
Target	AdobeRGB
Display Profile	Not considered
Rendering Intent	-

(1) Five equally spaced code values for each channel

White Point (CCT)	6462 Kelvin
White Point XYZ (normalized)	94.09 100.00 106.53
DeltaE to D50/ D65	18.23/ 2.22
Assumed Target Whitepoint (2)	6500 Kelvin
DeltaE to Assumed Target Whitepoint	2.14
Brightness (3)	228.80 cd/m <sup>2</sup>
Black Point (3)	0.28 cd/m <sup>2</sup>
Contrast (x:1)	817:1
Gradation (Average)	2.20

(1) Five equally spaced code values for each channel


(2) Daylight (3) Measured with i1 Display Pro

	Percent	Kelvin	Delta C	Delta E	Gamma
	5	-	-	-	-
	10	7011	1.16	1.19	2.22
	15	6681	0.51	0.76	2.23
	20	6644	0.63	0.98	2.24
	25	6612	0.94	1.34	2.25
	30	6634	1.00	1.14	2.23
	35	6596	1.00	1.03	2.21
	40	6625	1.08	1.13	2.22
	45	6606	1.00	1.00	2.20
	50	6600	1.33	1.33	2.20
	55	6591	1.53	1.54	2.19
	60	6583	0.99	0.99	2.20
	65	6578	1.12	1.12	2.19
	70	6560	1.20	1.20	2.19
	75	6528	1.03	1.05	2.18
	80	6525	0.92	0.92	2.19
	85	6528	0.86	0.87	2.18
	90	6525	0.95	0.97	2.14
	95	6487	0.36	0.39	2.12
	100 (4)	6461	-	-	-
	Average (5)	-	0.97	1.04	2.2
	Maximum (5)	-	1.53	1.54	-
	Range (5)	-	1.53	-	-

(4) Visual adaptation to display whitepoint is assumed

(5) Only luminance > 1% considered

### Corresponding Gamma

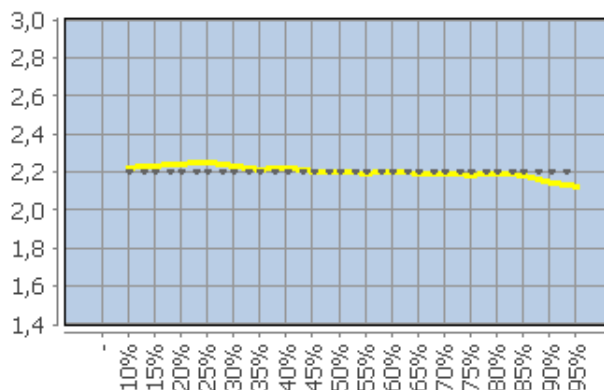

# Colorimetric Report

## Page (2/4)



C Calc 2.1  
 Copyright © 2014, Denis Freund  
 All Rights Reserved  
 licensed for PRAD ProAdviser

Date	Wednesday, December 3, 2014
Display	LG 31MU97-B
Sensor	X-Rite i1 Pro
Testchart	In accordance with ISO 12646:2007 (1)
Target	AdobeRGB
Display Profile	Not considered
Rendering Intent	-

(1) Five equally spaced code values for each channel

	RGB	Delta C	Delta H	Delta L	Delta E94
	0 0 0	1.35	0.00	0.89	1.61
	0 0 63	3.89	1.72	0.45	1.76
	0 0 127	4.08	2.44	1.01	1.73
	0 0 191	4.49	2.84	0.94	1.61
	0 0 255	4.55	2.99	0.81	1.43
	0 63 0	6.03	1.02	0.68	1.90
	0 63 63	1.56	0.12	0.61	0.91
	0 63 127	0.01	0.07	0.09	0.10
	0 63 191	1.49	1.57	0.28	0.81
	0 63 255	2.70	2.37	0.61	1.14
	0 127 0	3.46	0.82	0.04	0.72
	0 127 63	0.64	1.12	0.05	0.54
	0 127 127	0.10	0.32	0.29	0.34
	0 127 191	0.09	1.53	0.38	0.96
	0 127 255	1.77	2.75	0.64	1.48
	0 191 0	3.53	0.66	0.00	0.55
	0 191 63	1.46	0.80	0.08	0.38
	0 191 127	1.23	0.01	0.10	0.26
	0 191 191	0.11	0.10	0.23	0.23
	0 191 255	0.23	1.66	0.37	0.95
	0 255 0	3.76	0.57	0.09	0.48
	0 255 63	2.41	0.40	0.05	0.33
	0 255 127	1.67	0.02	0.19	0.31
	0 255 191	0.86	0.01	0.24	0.28
	0 255 255	0.19	0.52	0.27	0.36
	63 0 0	3.33	1.81	0.37	1.74
	63 0 63	2.33	0.77	0.57	1.10
	63 0 127	2.44	2.07	0.15	1.13
	63 0 191	2.95	2.64	0.39	1.21
	63 0 255	3.84	2.90	0.60	1.27
	63 63 0	3.69	0.64	0.89	1.70
	63 63 63	0.89	0.12	0.89	1.27
	63 63 127	0.14	1.20	0.37	0.81
	63 63 191	1.15	1.97	0.01	0.91
	63 63 255	2.62	2.49	0.35	1.07
	63 127 0	1.73	2.24	0.12	1.08
	63 127 63	1.43	0.32	0.09	0.43
	63 127 127	1.26	0.21	0.06	0.52
	63 127 191	0.20	2.18	0.26	1.34
	63 127 255	1.36	2.74	0.48	1.40
	63 191 0	1.96	1.50	0.05	0.61
	63 191 63	0.52	0.07	0.03	0.10
	63 191 127	0.14	0.43	0.06	0.21
	63 191 191	0.82	0.23	0.19	0.32
	63 191 255	0.62	1.59	0.38	0.97
	63 255 0	2.78	1.24	0.11	0.52
	63 255 63	1.75	0.21	0.13	0.27

# Colorimetric Report

## Page (3/4)



CCalc 2.1  
 Copyright © 2014, Denis Freund  
 All Rights Reserved  
 licensed for PRAD ProAdviser

Date	Wednesday, December 3, 2014
Display	LG 31MU97-B
Sensor	X-Rite i1 Pro
Testchart	In accordance with ISO 12646:2007 (1)
Target	AdobeRGB
Display Profile	Not considered
Rendering Intent	-

(1) Five equally spaced code values for each channel

	RGB	Delta C	Delta H	Delta L	Delta E94
	63 255 127	1.43	0.56	0.06	0.30
	63 255 191	0.15	0.35	0.20	0.25
	63 255 255	0.52	0.13	0.27	0.30
	127 0 0	1.70	1.60	0.38	0.96
	127 0 63	0.55	0.71	0.46	0.62
	127 0 127	1.24	0.76	0.12	0.49
	127 0 191	2.17	1.58	0.22	0.79
	127 0 255	3.02	1.95	0.37	0.90
	127 63 0	1.73	1.65	0.57	1.14
	127 63 63	0.04	0.44	0.53	0.60
	127 63 127	0.63	0.69	0.20	0.48
	127 63 191	1.24	1.35	0.03	0.67
	127 63 255	2.56	1.88	0.28	0.87
	127 127 0	1.79	1.08	0.14	0.73
	127 127 63	0.52	0.72	0.10	0.50
	127 127 127	1.19	0.18	0.09	1.21
	127 127 191	0.91	1.77	0.27	1.21
	127 127 255	1.82	2.22	0.43	1.22
	127 191 0	1.81	0.96	0.11	0.52
	127 191 63	0.05	0.19	0.03	0.09
	127 191 127	0.02	0.58	0.07	0.33
	127 191 191	1.10	0.22	0.26	0.54
	127 191 255	0.17	1.77	0.37	1.15
	127 255 0	2.75	0.85	0.29	0.56
	127 255 63	1.51	0.37	0.20	0.33
	127 255 127	1.73	0.54	0.22	0.44
	127 255 191	0.88	0.75	0.13	0.43
	127 255 255	0.56	0.40	0.12	0.29
	191 0 0	0.40	0.49	0.36	0.42
	191 0 63	0.17	0.50	0.32	0.39
	191 0 127	0.59	0.57	0.12	0.32
	191 0 191	1.33	0.76	0.02	0.40
	191 0 255	2.48	0.82	0.24	0.55
	191 63 0	0.51	0.62	0.35	0.45
	191 63 63	0.02	0.39	0.31	0.36
	191 63 127	0.59	0.52	0.12	0.32
	191 63 191	1.32	0.63	0.12	0.41
	191 63 255	2.40	0.99	0.23	0.60
	191 127 0	1.02	0.24	0.08	0.26
	191 127 63	0.37	0.94	0.04	0.51
	191 127 127	1.02	0.19	0.11	0.43
	191 127 191	1.56	0.67	0.24	0.68
	191 127 255	2.35	1.12	0.31	0.81
	191 191 0	1.44	0.50	0.05	0.37
	191 191 63	0.32	0.45	0.03	0.23
	191 191 127	0.26	0.58	0.12	0.41
	191 191 191	1.01	0.19	0.26	1.06

# Colorimetric Report

## Page (4/4)



CCalc 2.1  
 Copyright © 2014, Denis Freund  
 All Rights Reserved  
 licensed for PRAD ProAdviser

Date	Wednesday, December 3, 2014
Display	LG 31MU97-B
Sensor	X-Rite i1 Pro
Testchart	In accordance with ISO 12646:2007 (1)
Target	AdobeRGB
Display Profile	Not considered
Rendering Intent	-

(1) Five equally spaced code values for each channel

	RGB	Delta C	Delta H	Delta L	Delta E94
	191 191 255	0.84	1.41	0.32	1.04
	191 255 0	2.66	0.21	0.36	0.57
	191 255 63	2.06	0.30	0.41	0.56
	191 255 127	1.92	0.14	0.28	0.52
	191 255 191	1.27	0.53	0.23	0.56
	191 255 255	0.32	0.17	0.03	0.18
	255 0 0	0.18	0.44	0.05	0.17
	255 0 63	0.13	0.31	0.04	0.13
	255 0 127	0.65	0.49	0.16	0.28
	255 0 191	1.05	0.22	0.21	0.30
	255 0 255	2.16	0.32	0.10	0.38
	255 63 0	0.31	0.24	0.01	0.10
	255 63 63	0.01	0.19	0.00	0.08
	255 63 127	0.46	0.23	0.12	0.18
	255 63 191	1.08	0.17	0.23	0.32
	255 63 255	2.23	0.30	0.14	0.42
	255 127 0	1.20	0.20	0.08	0.25
	255 127 63	0.36	0.31	0.17	0.23
	255 127 127	0.66	0.14	0.24	0.30
	255 127 191	1.25	0.06	0.32	0.45
	255 127 255	2.43	0.04	0.43	0.67
	255 191 0	1.19	0.67	0.03	0.36
	255 191 63	0.68	0.36	0.09	0.24
	255 191 127	0.60	0.52	0.10	0.36
	255 191 191	0.51	0.07	0.19	0.29
	255 191 255	1.53	0.09	0.27	0.58
	255 255 0	2.31	0.68	0.41	0.62
	255 255 63	1.92	0.68	0.41	0.61
	255 255 127	1.91	1.11	0.25	0.77
	255 255 191	1.34	0.72	0.21	0.75
	255 255 255 (1)	-	-	-	-
	Average (2)	1.43	0.84	0.26	0.64
	Maximum (2)	6.03	2.99	1.01	1.90

(1) Visual adaptation to display whitepoint is assumed; CIELAB reference values are adapted (Bradford transformation) to display whitepoint

(2) Without Black

RGB values compressed to video level if necessary

Color Space	Gamut Volume CIELAB D50
AdobeRGB	97.10%