

Colorimetric Report

Page (1/5)



CCalc 2.0
Copyright © 2011, Denis Freund
All Rights Reserved
licensed for PRAD ProAdviser

Test Device	Iyama_PLG2773HS
Target	sRGB
Display Profile	not considered
Rendering Intent	-


White Point / CCT Kelvin	6645K
White Point XYZ (normalized)	94.83 100.0 110.68
DeltaE to D50/ D65	20.75/ 1.16
DeltaE to Blackbody Curve *	0.3
Assumed Target Whitepoint	6600K
DeltaE to Assumed Target Whitepoint	0.38
Brightness / cd/m ² **	308.8
Black Point / cd/m ² **	0.273
Contrast / x:1	1131:1
Gradation (Average)	2.62

* Based on CCT ** Measured with X-Rite DTP94 or comparable probe

	Percent	Kelvin	deltaC	deltaE	Gamma
	5	-	-	-	-
	10	11393	2.44	6.32	2.48
	15	11155	4.76	9.36	2.54
	20	11408	6.27	10.65	2.6
	25	11038	6.97	11.5	2.67
	30	10802	7.63	12.04	2.72
	35	10600	8.44	12.91	2.75
	40	10263	8.82	13.03	2.78
	45	10031	9.68	13.06	2.77
	50	9780	10.06	12.56	2.73
	55	9821	11.01	13.05	2.72
	60	9435	10.97	12.54	2.71
	65	9121	10.77	11.76	2.66
	70	8897	10.9	11.52	2.63
	75	8495	9.89	10.39	2.61
	80	8116	8.48	8.6	2.46
	85	7968	8.38	8.43	2.44
	90	7606	6.63	6.67	2.51
	95	7122	3.65	3.67	2.43
	100	6644	-	-	-
	Average	-	8.66*	10.77*	2.62
	Maximum	-	11.01*	13.06*	-
	Range	-	7.41*	-	-

* Only luminance > 1% considered
Without Black Point Compensation

Corresponding Gamma

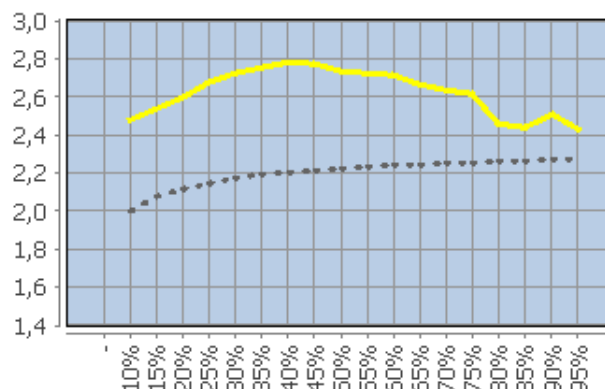

Colorimetric Report

Page (2/5)



CCalc 2.0
Copyright © 2011, Denis Freund
All Rights Reserved
licensed for PRAD ProAdviser

Test Device	Iyama_PLG2773HS
Target	sRGB
Display Profile	not considered
Rendering Intent	-

	RGB	deltaC	deltaH	deltaL	deltaE94
	255 0 0	1.04	7.68	0.04	3.0
	0 255 0	6.07	9.25	0.86	3.55
	0 0 255	1.07	1.24	1.57	1.63
	0 255 255	3.26	2.38	0.48	1.76
	255 0 255	2.49	2.71	0.63	1.24
	255 255 0	12.54	1.6	0.35	2.45
	170 85 85	1.36	4.52	7.85	8.37
	85 170 85	3.92	2.3	5.44	5.69
	85 85 170	20.62	3.31	7.51	9.93
	85 170 170	2.28	11.18	4.91	9.42
	170 85 170	13.54	8.18	6.59	8.83
	170 170 85	2.32	4.91	5.39	6.18
	229 0 0	5.65	4.14	2.22	2.99
	204 0 0	8.03	2.45	3.04	3.6
	178 0 0	11.77	0.3	4.49	5.17
	153 0 0	14.15	1.15	5.57	6.54
	127 0 0	15.38	2.35	6.2	7.54
	102 0 0	16.78	4.36	6.86	8.92
	76 0 0	15.76	5.78	6.17	9.17
	0 229 0	3.68	5.67	2.11	3.07
	0 204 0	2.47	3.88	2.53	3.0
	0 178 0	1.48	2.42	4.95	5.07
	0 153 0	4.44	1.52	6.66	6.76
	0 127 0	7.08	0.59	7.94	8.12
	0 102 0	10.33	0.39	9.31	9.71
	0 76 0	12.98	2.24	8.83	9.78
	0 0 229	4.43	0.35	1.69	1.82
	0 0 204	5.83	1.12	1.32	1.68
	0 0 178	4.98	1.46	0.54	1.19
	0 0 153	2.24	1.4	0.25	0.78
	0 0 127	1.03	1.1	0.99	1.14
	0 0 102	4.87	0.67	1.7	2.11
	0 0 76	9.22	1.47	0.79	2.94
	0 229 229	3.49	10.0	1.61	6.23
	0 204 204	3.15	11.68	2.06	7.52
	0 178 178	3.62	14.81	4.49	10.51
	0 153 153	3.97	14.85	6.3	11.76
	0 127 127	4.4	13.54	7.68	12.24
	0 102 102	4.77	12.07	9.22	12.89
	0 76 76	4.78	10.3	8.86	12.09
	229 0 229	1.84	7.36	0.73	2.94
	204 0 204	3.01	8.23	1.47	3.69
	178 0 178	2.57	9.14	3.01	4.98
	153 0 153	0.75	8.98	4.35	5.99
	127 0 127	1.59	8.16	5.34	6.69
	102 0 102	4.37	7.44	6.41	7.62
	76 0 76	5.44	6.58	6.22	7.5

Colorimetric Report

Page (3/5)



CCalc 2.0
Copyright © 2011, Denis Freund
All Rights Reserved
licensed for PRAD ProAdviser

Test Device	Iyama_PLG2773HS
Target	sRGB
Display Profile	not considered
Rendering Intent	-

	RGB	deltaC	deltaH	deltaL	deltaE94
	229 229 0	8.21	3.9	1.83	2.97
	204 204 0	6.01	6.0	2.32	3.78
	178 178 0	1.91	6.46	4.97	5.85
	153 153 0	1.22	6.58	6.92	7.67
	127 127 0	4.3	6.2	8.4	9.11
	102 102 0	7.3	5.6	10.06	10.8
	76 76 0	10.04	5.46	9.84	11.0
	255 25 25	4.21	9.37	0.61	3.9
	255 51 51	4.56	7.16	1.47	3.52
	255 76 76	5.15	4.24	2.55	3.41
	255 102 102	5.5	0.65	3.57	3.85
	255 127 127	3.96	3.14	3.58	4.15
	255 153 153	2.91	6.0	3.22	5.01
	255 178 178	1.65	7.37	2.23	5.58
	255 204 204	0.31	6.15	0.57	4.81
	255 229 229	0.81	5.33	0.41	4.72
	25 255 25	7.63	9.38	0.83	3.7
	51 255 51	8.43	8.3	0.92	3.53
	76 255 76	9.2	6.5	1.12	3.23
	102 255 102	9.19	3.94	1.37	2.81
	127 255 127	6.42	0.68	1.46	2.06
	153 255 153	3.37	2.29	1.47	2.08
	178 255 178	0.07	4.35	1.3	2.84
	204 255 204	2.48	4.94	0.93	3.61
	229 255 229	2.13	4.68	0.69	4.02
	25 25 255	3.03	0.02	0.13	0.47
	51 51 255	8.07	1.36	1.88	2.32
	76 76 255	12.71	2.14	4.09	4.74
	102 102 255	15.26	1.86	5.76	6.58
	127 127 255	13.44	0.22	5.62	6.45
	153 153 255	10.95	1.48	5.05	5.98
	178 178 255	7.44	2.79	3.66	4.8
	204 204 255	2.91	3.84	1.5	3.38
	229 229 255	2.09	2.98	1.16	3.03
	25 255 255	2.67	1.99	0.43	1.48
	51 255 255	1.76	1.8	0.49	1.29
	76 255 255	0.4	1.64	0.65	1.18
	102 255 255	1.19	1.47	0.84	1.3
	127 255 255	2.29	1.31	0.97	1.54
	153 255 255	3.19	1.13	1.06	1.87
	178 255 255	3.26	0.96	1.01	1.98
	204 255 255	2.46	0.78	0.8	1.73
	229 255 255	2.24	0.5	0.68	1.8

Colorimetric Report

Page (4/5)



CCalc 2.0
Copyright © 2011, Denis Freund
All Rights Reserved
licensed for PRAD ProAdviser

Test Device	Iyama_PLG2773HS
Target	sRGB
Display Profile	not considered
Rendering Intent	-

	RGB	deltaC	deltaH	deltaL	deltaE94
	255 25 255	0.93	2.77	0.16	1.05
	255 51 255	1.45	2.67	0.54	1.17
	255 76 255	4.43	2.48	1.45	1.93
	255 102 255	7.31	2.3	2.4	2.96
	255 127 255	7.64	2.27	2.6	3.28
	255 153 255	6.99	2.25	2.52	3.31
	255 178 255	4.62	2.19	1.84	2.67
	255 204 255	0.52	1.98	0.47	1.43
	255 229 255	0.4	1.37	0.43	1.2
	255 255 25	13.47	1.79	0.45	2.7
	255 255 51	13.42	1.75	0.47	2.8
	255 255 76	12.98	1.66	0.49	2.89
	255 255 102	11.32	1.39	0.52	2.77
	255 255 127	7.13	0.93	0.5	1.99
	255 255 153	2.71	0.59	0.44	1.0
	255 255 178	1.37	0.38	0.34	0.65
	255 255 204	4.08	0.34	0.21	1.91
	255 255 229	4.16	0.29	0.12	2.63
	213 255 0	11.13	1.02	1.35	2.48
	159 191 0	4.75	7.08	4.4	5.55
	106 128 0	2.77	7.08	8.49	9.32
	0 255 85	5.86	9.37	1.06	3.93
	0 191 64	1.27	3.9	4.37	4.71
	0 128 42	4.7	1.69	8.17	8.31
	0 128 255	14.99	10.36	5.1	7.91
	0 96 191	22.7	14.75	6.26	11.88
	0 64 128	14.41	11.74	7.15	11.3
	170 0 255	0.61	7.09	1.81	3.11
	127 0 191	6.63	7.43	3.23	4.6
	85 0 128	0.84	6.15	4.85	5.68
	255 0 42	2.81	11.46	0.1	4.72
	191 0 32	6.3	5.74	3.68	4.76
	128 0 21	11.52	2.15	6.1	7.02
	170 85 0	6.8	3.27	8.55	8.89
	0 170 85	2.19	1.83	5.97	6.07
	85 0 170	6.01	4.55	3.16	3.87
	0 85 170	21.3	14.4	6.84	12.28
	170 0 85	8.9	0.9	4.71	5.27
	85 170 0	2.26	3.92	5.71	6.0
	123 127 127	8.98	4.32	8.16	12.45
	127 123 127	9.7	4.03	8.46	12.67
	127 127 123	4.57	7.69	8.25	11.85
	Average	5.91	4.48	3.36	4.99
	Maximum	22.7	14.85	10.06	12.89

Colorimetric Report

Page (5/5)



CCalc 2.0
Copyright © 2011, Denis Freund
All Rights Reserved
licensed for PRAD ProAdviser

Test Device	Iyama_PLG2773HS
Target	sRGB
Display Profile	not considered
Rendering Intent	-

Property	Device adjustments
Backlight brightness	
Brightness	100
Contrast	50
RGB Gain	100 100 100
Gradation	
Other	Werkseinstellung User Color