

Colorimetric Report

Page (1/4)



CCalc 2.4
Copyright © 2018, Denis Freund
All Rights Reserved
lic. for PRAD ProAdviser

Date	Tuesday, October 1, 2019
Tester	Denis Freund
Display	BenQ PD3220U
Sensor	X-Rite i1 Pro
Testchart	In accordance with ISO 12646:2007 (1)
Target	AdobeRGB
Display Profile	Considered
Rendering Intent	Relative colorimetric

(1) Five equally spaced code values for each channel


White Point (CCT)	6512 Kelvin
White Point XYZ (normalized)	94.98 100.00 108.92
DeltaE to D50/ D65	19.55/ 0.12
Assumed Target Whitepoint (2)	6500 Kelvin
DeltaE to Assumed Target Whitepoint	0.11
Brightness (3)	142.50 cd/m ²
Black Point (3)	0.10 cd/m ²
Contrast (x:1)	1425:1
Gradation (Average)	2.21

(2) Daylight (3) Measured separately

	Percent	Kelvin	Delta C	Delta E	Gamma
	5	-	-	-	-
	10	6668	0.91	1.37	2.13
	15	6603	1.76	1.79	2.18
	20	6128	1.21	1.23	2.19
	25	6392	0.84	0.84	2.20
	30	6378	0.56	0.56	2.20
	35	6565	0.62	0.63	2.20
	40	6379	0.58	0.58	2.20
	45	6589	0.49	0.49	2.20
	50	6502	0.07	0.15	2.21
	55	6562	0.88	0.93	2.22
	60	6521	0.18	0.21	2.21
	65	6490	0.38	0.39	2.20
	70	6543	0.23	0.23	2.20
	75	6571	0.39	0.44	2.22
	80	6513	0.39	0.47	2.23
	85	6508	0.05	0.26	2.24
	90	6560	0.58	0.64	2.27
	95	6535	0.36	0.40	2.30
	100 (4)	6513	-	-	-
	Average (5)	-	0.56	0.6	2.21
	Maximum (5)	-	1.76	1.79	-
	Range (5)	-	2.56	-	-

(4) Visual adaptation to display whitepoint is assumed
(5) Only luminance > 1% considered

Corresponding Gamma

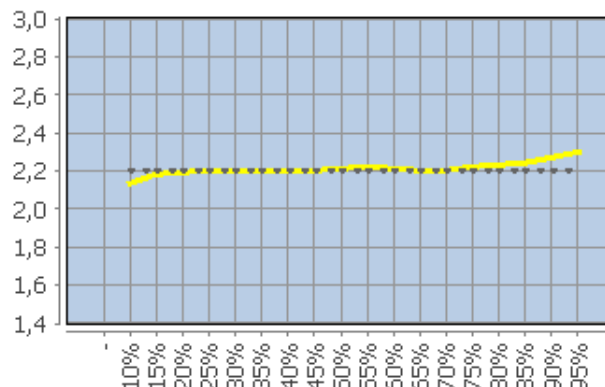

Colorimetric Report

Page (2/4)



CCalc 2.4
Copyright © 2018, Denis Freund
All Rights Reserved
lic. for PRAD ProAdviser

Date	Tuesday, October 1, 2019
Tester	Denis Freund
Display	BenQ PD3220U
Sensor	X-Rite i1 Pro
Testchart	In accordance with ISO 12646:2007 (1)
Target	AdobeRGB
Display Profile	Considered
Rendering Intent	Relative colorimetric

(1) Five equally spaced code values for each channel

	RGB	Delta C	Delta H	Delta L	Delta E94
	0 0 0	1.56	0.00	1.41	2.10
	0 0 63	1.58	1.50	1.13	1.55
	0 0 127	3.80	0.59	1.66	1.86
	0 0 191	1.41	1.74	1.27	1.45
	0 0 255	0.75	2.24	1.21	1.42
	0 63 0	13.75	7.53	1.10	5.68
	0 63 63	9.16	0.66	0.97	4.12
	0 63 127	0.92	5.09	1.06	3.20
	0 63 191	0.41	4.08	1.27	2.21
	0 63 255	0.11	3.82	1.14	1.80
	0 127 0	17.22	13.43	1.57	6.45
	0 127 63	16.26	10.19	1.42	6.09
	0 127 127	14.25	1.02	1.32	4.71
	0 127 191	5.21	9.39	1.74	5.91
	0 127 255	0.35	8.44	1.44	4.18
	0 191 0	21.11	18.88	1.74	7.18
	0 191 63	21.25	16.77	2.08	7.19
	0 191 127	21.60	9.04	1.82	6.02
	0 191 191	18.88	1.94	1.96	5.26
	0 191 255	10.54	11.55	1.95	7.01
	0 255 0	25.31	24.18	2.23	7.89
	0 255 63	25.88	22.21	2.18	7.76
	0 255 127	26.28	16.15	2.25	7.06
	0 255 191	25.94	7.91	2.23	5.99
	0 255 255	23.96	3.33	2.29	5.85
	63 0 0	2.37	0.66	0.94	1.36
	63 0 63	2.41	0.60	0.72	1.16
	63 0 127	1.34	0.46	0.34	0.51
	63 0 191	0.47	0.03	0.22	0.24
	63 0 255	0.72	0.44	0.05	0.19
	63 63 0	2.79	0.72	0.26	1.18
	63 63 63	0.79	0.00	0.27	0.83
	63 63 127	0.72	0.01	0.21	0.32
	63 63 191	0.49	0.12	0.03	0.12
	63 63 255	0.51	0.59	0.02	0.23
	63 127 0	2.27	0.32	0.11	0.52
	63 127 63	0.16	0.93	0.06	0.49
	63 127 127	0.32	0.52	0.01	0.36
	63 127 191	0.30	1.48	0.01	0.89
	63 127 255	0.83	2.95	0.17	1.41
	63 191 0	10.07	9.10	1.05	3.71
	63 191 63	9.53	8.68	0.95	3.82
	63 191 127	10.45	5.34	1.11	3.51
	63 191 191	10.50	1.31	1.00	3.19
	63 191 255	5.88	7.56	1.04	4.60
	63 255 0	17.00	17.78	1.45	5.88
	63 255 63	17.92	15.70	1.71	5.71

Colorimetric Report

Page (3/4)



CCalc 2.4
Copyright © 2018, Denis Freund
All Rights Reserved
lic. for PRAD ProAdviser

Date	Tuesday, October 1, 2019
Tester	Denis Freund
Display	BenQ PD3220U
Sensor	X-Rite i1 Pro
Testchart	In accordance with ISO 12646:2007 (1)
Target	AdobeRGB
Display Profile	Considered
Rendering Intent	Relative colorimetric

(1) Five equally spaced code values for each channel

	RGB	Delta C	Delta H	Delta L	Delta E94
	63 255 127	18.85	11.63	1.55	5.26
	63 255 191	19.11	6.00	1.55	4.63
	63 255 255	17.72	2.13	1.89	4.57
	127 0 0	1.45	0.97	0.18	0.62
	127 0 63	0.63	1.01	0.05	0.58
	127 0 127	0.44	0.17	0.05	0.14
	127 0 191	0.74	0.12	0.12	0.19
	127 0 255	0.61	0.18	0.18	0.21
	127 63 0	1.38	0.79	0.11	0.57
	127 63 63	0.18	1.09	0.06	0.68
	127 63 127	0.34	0.09	0.09	0.15
	127 63 191	0.39	0.05	0.04	0.10
	127 63 255	0.48	0.08	0.23	0.25
	127 127 0	1.09	0.34	0.26	0.42
	127 127 63	0.78	0.20	0.10	0.32
	127 127 127	0.13	0.04	0.21	0.25
	127 127 191	0.93	0.31	0.25	0.47
	127 127 255	0.30	0.19	0.20	0.23
	127 191 0	0.27	0.18	0.13	0.16
	127 191 63	0.54	0.42	0.12	0.25
	127 191 127	0.21	0.16	0.14	0.17
	127 191 191	0.07	0.17	0.02	0.12
	127 191 255	0.14	0.48	0.10	0.31
	127 255 0	0.26	0.67	0.30	0.37
	127 255 63	0.25	0.01	0.09	0.09
	127 255 127	0.71	0.10	0.18	0.22
	127 255 191	0.74	0.38	0.20	0.32
	127 255 255	0.57	0.44	0.02	0.29
	191 0 0	0.37	0.12	0.32	0.33
	191 0 63	0.05	0.50	0.22	0.32
	191 0 127	0.39	0.20	0.30	0.32
	191 0 191	0.03	0.24	0.12	0.16
	191 0 255	0.04	0.69	0.06	0.26
	191 63 0	1.15	1.07	0.07	0.52
	191 63 63	0.30	0.68	0.22	0.40
	191 63 127	0.08	0.03	0.19	0.19
	191 63 191	0.55	0.35	0.10	0.22
	191 63 255	0.95	0.41	0.44	0.50
	191 127 0	0.14	0.28	0.49	0.50
	191 127 63	0.06	0.16	0.17	0.19
	191 127 127	0.14	0.26	0.16	0.24
	191 127 191	0.07	0.12	0.16	0.18
	191 127 255	1.32	0.04	0.25	0.39
	191 191 0	0.84	0.54	0.12	0.31
	191 191 63	0.12	0.32	0.09	0.19
	191 191 127	0.32	0.57	0.08	0.40
	191 191 191	0.37	0.17	0.24	0.47

Colorimetric Report

Page (4/4)



CCalc 2.4
Copyright © 2018, Denis Freund
All Rights Reserved
lic. for PRAD ProAdviser

Date	Tuesday, October 1, 2019
Tester	Denis Freund
Display	BenQ PD3220U
Sensor	X-Rite i1 Pro
Testchart	In accordance with ISO 12646:2007 (1)
Target	AdobeRGB
Display Profile	Considered
Rendering Intent	Relative colorimetric

(1) Five equally spaced code values for each channel

	RGB	Delta C	Delta H	Delta L	Delta E94
	191 191 255	0.74	0.16	0.35	0.47
	191 255 0	0.18	0.49	0.25	0.31
	191 255 63	0.08	0.02	0.34	0.34
	191 255 127	0.12	0.19	0.19	0.22
	191 255 191	0.16	0.01	0.15	0.16
	191 255 255	0.03	0.47	0.42	0.53
	255 0 0	10.92	0.48	4.75	5.07
	255 0 63	10.78	1.58	4.69	5.09
	255 0 127	8.38	6.10	4.63	5.51
	255 0 191	4.65	8.29	4.17	5.39
	255 0 255	1.39	7.91	3.86	4.81
	255 63 0	9.96	1.90	4.58	4.92
	255 63 63	10.75	0.33	4.27	4.71
	255 63 127	8.95	4.55	4.30	5.07
	255 63 191	4.84	8.08	3.87	5.23
	255 63 255	1.69	7.80	3.42	4.53
	255 127 0	7.65	5.64	3.29	4.23
	255 127 63	8.48	3.87	3.34	4.13
	255 127 127	9.34	0.29	2.91	3.74
	255 127 191	6.50	5.08	2.71	4.07
	255 127 255	3.00	6.23	2.43	3.75
	255 191 0	2.43	6.21	1.68	3.10
	255 191 63	3.29	5.68	1.70	3.17
	255 191 127	4.64	4.26	1.54	3.19
	255 191 191	5.63	0.17	1.31	2.66
	255 191 255	2.83	3.64	1.24	2.69
	255 255 0	0.67	1.15	0.36	0.58
	255 255 63	0.19	1.14	0.40	0.62
	255 255 127	0.30	1.41	0.04	0.71
	255 255 191	0.48	0.82	0.03	0.58
	255 255 255 (1)	-	-	-	-
	Average (2)	4.93	3.27	1.06	2.24
	Maximum (2)	26.28	24.18	4.75	7.89

(1) Visual adaptation to display whitepoint is assumed; CIELAB reference values are adapted (Bradford transformation) to display whitepoint
(2) Without Black

Color Space	Gamut Volume CIELAB D50
AdobeRGB	80%