

Colorimetric Report

Page (1/4)



CCalc 2.5
Copyright © 2020, Denis Freund
All Rights Reserved
lic. for PRAD ProAdviser

Date	Tuesday, June 1, 2021
Tester	Denis Freund
Display	MSI MD271QP
Sensor	X-Rite i1 Pro
Testchart	In accordance with ISO 12646:2007 (1)
Target	AdobeRGB
Display Profile	Considered
Rendering Intent	Relative colorimetric

(1) Five equally spaced code values for each channel


White Point (CCT)	6434 Kelvin
White Point XYZ (normalized)	95.26 100.00 108.20
DeltaE to D50/ D65	19.01/ 0.56
Assumed Target Whitepoint (2)	6400 Kelvin
DeltaE to Assumed Target Whitepoint	0.70
Brightness (3)	142.70 cd/m ²
Black Point (3)	0.13 cd/m ²
Contrast (x:1)	1098:1
Gradation (Average)	2.18

(2) Daylight (3) Measured separately

	Percent	Kelvin	Delta C	Delta E	Gamma
	5	-	-	-	-
	10	7442	1.31	1.31	2.21
	15	6514	0.19	0.81	2.16
	20	6630	0.49	0.64	2.18
	25	6571	0.49	0.60	2.18
	30	6352	0.38	0.48	2.18
	35	6393	0.20	0.48	2.18
	40	6474	0.54	0.58	2.19
	45	6352	0.54	0.75	2.17
	50	6445	0.10	0.11	2.20
	55	6384	0.41	0.50	2.18
	60	6483	0.31	0.32	2.19
	65	6443	0.11	0.42	2.17
	70	6410	0.16	0.16	2.20
	75	6468	0.24	0.26	2.19
	80	6397	0.27	0.28	2.19
	85	6430	0.20	0.37	2.14
	90	6471	0.57	0.71	2.08
	95	6460	0.31	0.31	2.20
	100 (4)	6434	-	-	-
	Average (5)	-	0.32	0.46	2.18
	Maximum (5)	-	0.57	0.81	-
	Range (5)	-	1.02	-	-

(4) Visual adaptation to display whitepoint is assumed
(5) Only luminance > 1% considered

Corresponding Gamma

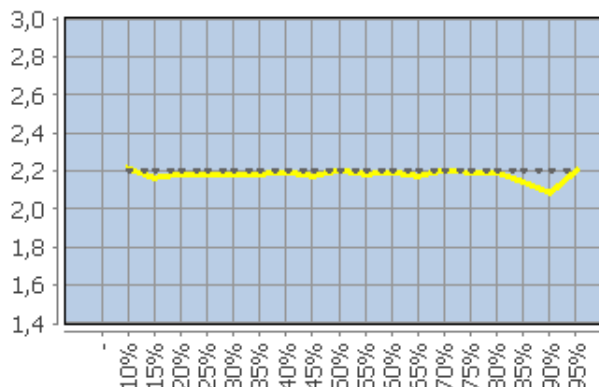

Colorimetric Report

Page (2/4)



CCalc 2.5
Copyright © 2020, Denis Freund
All Rights Reserved
lic. for PRAD ProAdviser

Date	Tuesday, June 1, 2021
Tester	Denis Freund
Display	MSI MD271QP
Sensor	X-Rite i1 Pro
Testchart	In accordance with ISO 12646:2007 (1)
Target	AdobeRGB
Display Profile	Considered
Rendering Intent	Relative colorimetric

(1) Five equally spaced code values for each channel

	RGB	Delta C	Delta H	Delta L	Delta E94
	0 0 0	1.31	0.00	1.10	1.72
	0 0 63	1.79	2.35	0.07	1.56
	0 0 127	1.71	0.90	1.18	1.30
	0 0 191	2.53	1.06	1.61	1.72
	0 0 255	2.31	1.47	1.64	1.74
	0 63 0	15.35	12.93	1.61	8.32
	0 63 63	13.35	1.01	1.84	6.12
	0 63 127	1.37	6.29	1.67	4.09
	0 63 191	0.61	4.58	1.57	2.57
	0 63 255	1.60	3.27	1.74	2.13
	0 127 0	21.70	23.79	2.65	10.69
	0 127 63	22.67	17.00	2.97	9.77
	0 127 127	20.90	1.23	2.78	7.16
	0 127 191	7.47	12.47	2.70	8.02
	0 127 255	1.67	10.97	2.80	5.83
	0 191 0	28.96	31.51	3.96	11.95
	0 191 63	29.79	27.88	3.89	11.71
	0 191 127	30.69	16.41	3.85	10.00
	0 191 191	27.80	0.47	3.90	8.06
	0 191 255	17.36	17.91	5.27	11.80
	0 255 0	35.41	38.76	4.59	12.76
	0 255 63	36.11	36.17	4.52	12.64
	0 255 127	38.20	27.60	4.73	11.88
	0 255 191	37.94	14.95	4.92	10.21
	0 255 255	34.56	2.14	4.41	8.71
	63 0 0	2.21	0.08	0.53	0.99
	63 0 63	1.04	0.12	0.12	0.39
	63 0 127	0.55	0.13	0.06	0.15
	63 0 191	0.06	0.17	0.07	0.09
	63 0 255	0.91	0.47	0.34	0.40
	63 63 0	0.90	0.00	0.25	0.42
	63 63 63	0.79	0.17	0.05	0.81
	63 63 127	0.40	0.15	0.44	0.47
	63 63 191	0.68	0.00	0.26	0.30
	63 63 255	0.81	0.53	0.25	0.34
	63 127 0	4.73	6.75	0.68	3.27
	63 127 63	5.82	5.17	0.61	3.19
	63 127 127	6.58	0.35	0.99	2.79
	63 127 191	2.83	4.87	1.18	3.30
	63 127 255	0.40	5.36	1.39	2.87
	63 191 0	17.90	21.37	2.87	8.53
	63 191 63	18.88	19.07	2.81	8.45
	63 191 127	20.22	12.13	2.84	7.62
	63 191 191	19.26	0.06	2.86	6.12
	63 191 255	10.59	12.65	2.82	8.09
	63 255 0	27.46	32.27	3.89	10.91
	63 255 63	29.38	29.70	3.94	10.80

Colorimetric Report

Page (3/4)



CCalc 2.5
Copyright © 2020, Denis Freund
All Rights Reserved
lic. for PRAD ProAdviser

Date	Tuesday, June 1, 2021
Tester	Denis Freund
Display	MSI MD271QP
Sensor	X-Rite i1 Pro
Testchart	In accordance with ISO 12646:2007 (1)
Target	AdobeRGB
Display Profile	Considered
Rendering Intent	Relative colorimetric

(1) Five equally spaced code values for each channel

	RGB	Delta C	Delta H	Delta L	Delta E94
	63 255 127	30.48	23.34	4.02	10.30
	63 255 191	30.95	12.95	4.22	8.95
	63 255 255	29.10	2.45	3.80	7.74
	127 0 0	0.38	1.60	0.04	0.79
	127 0 63	0.20	0.74	0.15	0.43
	127 0 127	0.75	0.52	0.07	0.32
	127 0 191	0.15	0.02	0.13	0.14
	127 0 255	0.21	0.24	0.16	0.19
	127 63 0	0.26	0.64	0.03	0.34
	127 63 63	0.12	0.39	0.13	0.28
	127 63 127	0.56	0.24	0.19	0.29
	127 63 191	0.40	0.11	0.22	0.25
	127 63 255	0.19	0.10	0.41	0.41
	127 127 0	0.33	0.43	0.17	0.29
	127 127 63	0.24	0.00	0.12	0.15
	127 127 127	0.53	0.07	0.37	0.65
	127 127 191	0.47	0.32	0.16	0.31
	127 127 255	0.16	0.04	0.36	0.36
	127 191 0	0.10	0.30	0.07	0.14
	127 191 63	0.64	0.11	0.31	0.34
	127 191 127	0.18	0.05	0.34	0.35
	127 191 191	0.27	0.03	0.37	0.39
	127 191 255	0.35	0.37	0.09	0.27
	127 255 0	7.07	10.32	1.36	3.79
	127 255 63	7.36	9.70	1.25	3.76
	127 255 127	8.91	8.12	1.53	3.94
	127 255 191	10.20	4.77	1.37	3.53
	127 255 255	10.57	1.22	1.41	3.36
	191 0 0	0.02	1.49	0.43	0.75
	191 0 63	0.00	1.00	0.29	0.54
	191 0 127	0.45	0.01	0.13	0.16
	191 0 191	0.24	0.02	0.19	0.20
	191 0 255	0.33	0.19	0.53	0.54
	191 63 0	0.46	0.23	0.34	0.37
	191 63 63	0.03	0.19	0.23	0.25
	191 63 127	0.13	0.41	0.42	0.47
	191 63 191	0.52	0.10	0.07	0.14
	191 63 255	0.18	0.08	0.27	0.27
	191 127 0	0.09	0.09	0.17	0.18
	191 127 63	0.04	0.22	0.41	0.43
	191 127 127	0.02	0.26	0.32	0.36
	191 127 191	0.33	0.07	0.11	0.16
	191 127 255	0.23	0.17	0.41	0.43
	191 191 0	0.40	0.24	0.11	0.17
	191 191 63	0.19	0.04	0.10	0.11
	191 191 127	0.38	0.14	0.22	0.28
	191 191 191	0.15	0.10	0.13	0.23

Colorimetric Report

Page (4/4)



CCalc 2.5
Copyright © 2020, Denis Freund
All Rights Reserved
lic. for PRAD ProAdviser

Date	Tuesday, June 1, 2021
Tester	Denis Freund
Display	MSI MD271QP
Sensor	X-Rite i1 Pro
Testchart	In accordance with ISO 12646:2007 (1)
Target	AdobeRGB
Display Profile	Considered
Rendering Intent	Relative colorimetric

(1) Five equally spaced code values for each channel

	RGB	Delta C	Delta H	Delta L	Delta E94
	191 191 255	0.09	0.03	0.19	0.19
	191 255 0	0.41	0.36	0.06	0.16
	191 255 63	0.28	0.23	0.03	0.11
	191 255 127	0.16	0.41	0.13	0.23
	191 255 191	0.51	0.59	0.00	0.38
	191 255 255	0.29	0.53	0.05	0.39
	255 0 0	17.43	2.33	9.19	9.64
	255 0 63	16.59	6.99	9.22	10.04
	255 0 127	9.95	14.97	9.26	11.30
	255 0 191	3.34	16.39	8.35	10.63
	255 0 255	1.07	14.51	7.43	9.11
	255 63 0	17.07	0.12	8.47	8.93
	255 63 63	17.33	4.75	8.41	9.19
	255 63 127	12.63	12.09	8.04	9.94
	255 63 191	5.81	15.00	7.34	9.74
	255 63 255	1.07	13.93	6.57	8.43
	255 127 0	13.93	8.31	5.56	6.96
	255 127 63	15.75	5.64	5.32	6.70
	255 127 127	15.89	2.27	5.03	6.52
	255 127 191	9.59	10.26	4.87	7.50
	255 127 255	4.42	11.29	4.21	6.63
	255 191 0	4.69	10.01	2.58	4.95
	255 191 63	5.97	9.73	2.37	5.16
	255 191 127	7.31	7.84	2.20	5.42
	255 191 191	9.42	0.45	2.03	4.37
	255 191 255	4.33	6.65	1.73	4.60
	255 255 0	0.89	1.73	0.10	0.68
	255 255 63	0.04	1.61	0.08	0.67
	255 255 127	0.74	1.53	0.01	0.79
	255 255 191	0.74	0.74	0.00	0.58
	255 255 255 (1)	-	-	-	-
	Average (2)	7.65	0.00	2.00	3.89
	Maximum (2)	38.20	38.76	9.26	12.76

(1) Visual adaptation to display whitepoint is assumed; CIELAB reference values are adapted (Bradford transformation) to display whitepoint

(2) Without Black

Color Space	Gamut Volume CIELAB D50
AdobeRGB	68%