

Colorimetric Report

Page (1/4)



CCalc 2.4
Copyright © 2018, Denis Freund
All Rights Reserved
lic. for PRAD ProAdviser

Date	Saturday, April 2, 2022
Tester	
Display	AOpen_43XV1CP
Sensor	X-Rite i1 Pro
Testchart	In accordance with ISO 12646:2007 (1)
Target	sRGB
Display Profile	Not considered
Rendering Intent	-

(1) Five equally spaced code values for each channel


White Point (CCT)	6609 Kelvin
White Point XYZ (normalized)	95.49 100.00 111.31
DeltaE to D50/ D65	21.04/ 1.67
Assumed Target Whitepoint (2)	6600 Kelvin
DeltaE to Assumed Target Whitepoint	1.08
Brightness (3)	398.70 cd/m²
Black Point (3)	0.26 cd/m²
Contrast (x:1)	1533:1
Gradation (Average)	2.09

(2) Daylight (3) Measured separately

	Percent	Kelvin	Delta C	Delta E	Gamma
	5	-	-	-	-
	10	6838	0.46	3.84	2.24
	15	6632	0.08	4.34	2.31
	20	6481	0.30	3.56	2.30
	25	6456	0.51	2.71	2.29
	30	6438	0.69	2.18	2.28
	35	6415	0.86	1.77	2.27
	40	6415	0.95	1.45	2.26
	45	6419	1.06	1.16	2.24
	50	6422	1.14	1.14	2.22
	55	6423	1.19	1.25	2.21
	60	6432	1.26	1.41	2.19
	65	6435	1.32	1.60	2.17
	70	6443	1.35	1.79	2.14
	75	6450	1.39	2.03	2.09
	80	6459	1.40	2.17	2.03
	85	6470	1.37	2.52	1.89
	90	6488	1.24	2.56	1.67
	95	6540	0.68	2.90	0.84
	100 (4)	6609	-	-	-
	Average (5)	-	0.99	2.15	2.09
	Maximum (5)	-	1.4	4.34	-
	Range (5)	-	1.48	-	-

(4) Visual adaptation to display whitepoint is assumed
(5) Only luminance > 1% considered

Corresponding Gamma

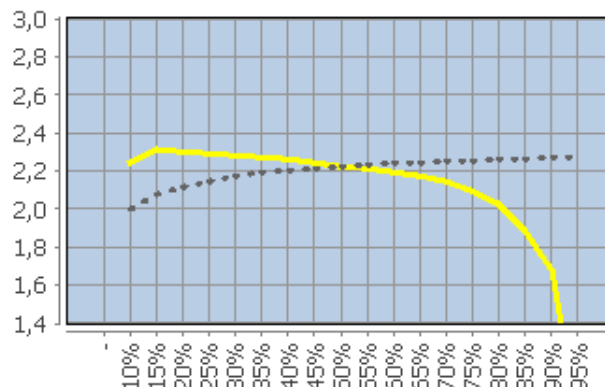

Colorimetric Report

Page (2/4)



CCalc 2.4
Copyright © 2018, Denis Freund
All Rights Reserved
lic. for PRAD ProAdviser

Date	Saturday, April 2, 2022
Tester	
Display	AOpen_43XV1CP
Sensor	X-Rite i1 Pro
Testchart	In accordance with ISO 12646:2007 (1)
Target	sRGB
Display Profile	Not considered
Rendering Intent	-

(1) Five equally spaced code values for each channel

	RGB	Delta C	Delta H	Delta L	Delta E94
	0 0 0	0.62	0.00	0.70	0.94
	0 0 63	5.27	0.99	0.08	1.88
	0 0 127	0.08	0.78	0.20	0.41
	0 0 191	3.65	1.39	0.98	1.28
	0 0 255	5.82	2.34	0.85	1.42
	0 63 0	0.47	1.92	2.75	2.99
	0 63 63	1.12	1.17	2.50	2.73
	0 63 127	3.88	2.95	1.76	2.85
	0 63 191	7.66	3.67	0.71	2.47
	0 63 255	8.08	3.69	0.23	1.92
	0 127 0	12.46	1.87	0.78	3.19
	0 127 63	10.68	2.09	0.46	3.42
	0 127 127	4.42	2.27	0.18	2.46
	0 127 191	2.51	0.20	0.28	0.92
	0 127 255	2.82	0.36	0.69	0.97
	0 191 0	20.84	3.14	0.91	4.21
	0 191 63	18.84	2.72	1.08	4.28
	0 191 127	12.39	1.54	1.21	3.67
	0 191 191	7.00	2.96	1.46	3.42
	0 191 255	2.14	5.09	1.69	3.52
	0 255 0	25.23	3.89	0.41	4.21
	0 255 63	22.69	2.87	0.39	3.96
	0 255 127	15.53	0.21	0.43	3.10
	0 255 191	10.37	0.75	0.55	2.67
	0 255 255	7.55	2.31	0.54	2.72
	63 0 0	0.90	3.44	1.66	2.86
	63 0 63	0.21	0.99	1.91	2.00
	63 0 127	3.05	0.37	0.82	1.10
	63 0 191	5.61	0.94	0.25	1.08
	63 0 255	6.79	2.07	0.37	1.26
	63 63 0	0.14	0.02	2.90	2.90
	63 63 63	0.45	0.05	2.54	2.58
	63 63 127	5.07	1.38	1.87	2.72
	63 63 191	8.21	2.43	0.86	2.30
	63 63 255	8.30	3.04	0.42	1.84
	63 127 0	13.15	0.35	0.71	3.44
	63 127 63	10.82	0.45	0.38	3.62
	63 127 127	4.67	1.94	0.07	2.80
	63 127 191	2.71	1.03	0.37	1.23
	63 127 255	2.50	0.35	0.77	0.98
	63 191 0	21.24	1.96	0.95	4.31
	63 191 63	18.82	1.49	1.12	4.33
	63 191 127	12.17	0.48	1.27	3.76
	63 191 191	7.19	2.73	1.51	3.62
	63 191 255	1.87	5.51	1.73	3.80
	63 255 0	25.19	3.32	0.29	4.21
	63 255 63	22.26	2.19	0.27	3.90

Colorimetric Report

Page (3/4)



CCalc 2.4
Copyright © 2018, Denis Freund
All Rights Reserved
lic. for PRAD ProAdviser

Date	Saturday, April 2, 2022
Tester	
Display	AOpen_43XV1CP
Sensor	X-Rite i1 Pro
Testchart	In accordance with ISO 12646:2007 (1)
Target	sRGB
Display Profile	Not considered
Rendering Intent	-

(1) Five equally spaced code values for each channel

	RGB	Delta C	Delta H	Delta L	Delta E94
	63 255 127	14.76	0.94	0.33	3.05
	63 255 191	9.83	1.36	0.45	2.68
	63 255 255	7.32	2.13	0.44	2.70
	127 0 0	5.87	2.68	1.18	2.41
	127 0 63	6.10	2.81	1.07	2.67
	127 0 127	6.28	1.88	0.70	1.92
	127 0 191	8.00	1.95	0.05	1.69
	127 0 255	8.43	3.19	0.27	1.71
	127 63 0	8.05	4.00	2.10	3.95
	127 63 63	7.40	0.47	1.83	3.64
	127 63 127	7.99	1.66	1.38	3.16
	127 63 191	9.80	2.75	0.64	2.63
	127 63 255	9.38	3.90	0.25	2.19
	127 127 0	12.39	1.55	0.57	3.58
	127 127 63	8.29	0.68	0.24	3.21
	127 127 127	1.01	0.11	0.05	1.02
	127 127 191	3.11	0.84	0.48	1.38
	127 127 255	3.23	1.48	0.88	1.36
	127 191 0	19.81	2.20	0.93	4.39
	127 191 63	16.37	1.55	1.14	4.21
	127 191 127	8.87	0.19	1.29	3.32
	127 191 191	4.10	2.07	1.53	3.03
	127 191 255	0.17	3.25	1.77	2.72
	127 255 0	23.45	4.19	0.26	4.27
	127 255 63	19.95	3.13	0.27	3.85
	127 255 127	11.61	0.13	0.34	2.59
	127 255 191	6.61	1.06	0.48	2.08
	127 255 255	4.44	1.62	0.49	2.02
	191 0 0	14.43	0.82	0.51	3.08
	191 0 63	11.75	2.35	0.50	3.10
	191 0 127	10.17	1.72	0.30	2.54
	191 0 191	10.95	2.39	0.16	2.34
	191 0 255	10.73	4.19	0.29	2.28
	191 63 0	17.22	0.56	1.26	4.15
	191 63 63	12.66	0.44	1.09	3.65
	191 63 127	11.41	0.24	0.81	3.29
	191 63 191	12.24	2.30	0.33	2.93
	191 63 255	11.32	4.55	0.07	2.64
	191 127 0	16.71	1.08	0.29	4.23
	191 127 63	11.07	0.38	0.00	3.52
	191 127 127	5.44	0.23	0.23	2.48
	191 127 191	6.21	1.59	0.59	2.43
	191 127 255	5.43	3.24	0.91	2.20
	191 191 0	19.88	2.11	0.99	4.62
	191 191 63	15.51	1.29	1.17	4.24
	191 191 127	6.30	0.25	1.32	2.83
	191 191 191	1.20	0.15	1.54	1.96

Colorimetric Report

Page (4/4)



CCalc 2.4
Copyright © 2018, Denis Freund
All Rights Reserved
lic. for PRAD ProAdviser

Date	Saturday, April 2, 2022
Tester	
Display	AOpen_43XV1CP
Sensor	X-Rite i1 Pro
Testchart	In accordance with ISO 12646:2007 (1)
Target	sRGB
Display Profile	Not considered
Rendering Intent	-

(1) Five equally spaced code values for each channel

	RGB	Delta C	Delta H	Delta L	Delta E94
	191 191 255	0.67	0.64	1.76	1.83
	191 255 0	22.39	5.29	0.28	4.57
	191 255 63	18.26	4.30	0.27	4.03
	191 255 127	8.51	1.45	0.36	2.25
	191 255 191	2.67	0.02	0.48	1.07
	191 255 255	0.72	0.89	0.48	0.91
	255 0 0	20.06	4.61	1.53	4.23
	255 0 63	13.64	0.65	1.60	3.13
	255 0 127	11.83	2.27	1.39	3.00
	255 0 191	13.38	1.29	1.06	2.80
	255 0 255	13.36	1.81	0.97	2.45
	255 63 0	21.15	3.48	1.97	4.60
	255 63 63	13.63	0.68	1.90	3.44
	255 63 127	11.70	3.57	1.68	3.57
	255 63 191	13.55	1.91	1.31	3.23
	255 63 255	13.23	1.71	1.15	2.66
	255 127 0	19.40	3.46	0.88	4.36
	255 127 63	12.00	2.05	0.69	3.09
	255 127 127	5.91	1.57	0.47	1.99
	255 127 191	7.19	1.74	0.17	2.24
	255 127 255	6.95	1.12	0.05	1.63
	255 191 0	21.18	2.85	0.42	4.64
	255 191 63	15.42	3.25	0.56	4.06
	255 191 127	4.90	2.16	0.69	2.21
	255 191 191	0.64	0.01	0.90	0.95
	255 191 255	0.58	0.48	1.04	1.10
	255 255 0	23.39	1.90	0.31	4.44
	255 255 63	18.42	1.11	0.32	3.80
	255 255 127	7.31	0.29	0.25	1.94
	255 255 191	0.98	0.61	0.14	0.59
	255 255 255 (1)	-	-	-	-
	Average (2)	9.67	1.84	0.84	2.81
	Maximum (2)	25.23	5.51	2.90	4.64

(1) Visual adaptation to display whitepoint is assumed; CIELAB reference values are adapted (Bradford transformation) to display whitepoint
(2) Without Black

Color Space	Gamut Volume CIELAB D50
sRGB	99%