

Colorimetric Report

Page (1/4)



CCalc 2.5
Copyright © 2020, Denis Freund
All Rights Reserved
lic. for PRAD ProAdviser

Date	Saturday, April 1, 2023
Tester	
Display	MSI_MD272
Sensor	X-Rite i1 Pro
Testchart	In accordance with ISO 12646:2007 (1)
Target	sRGB
Display Profile	Not considered
Rendering Intent	-

(1) Five equally spaced code values for each channel

White Point (CCT)	6214 Kelvin
White Point XYZ (normalized)	96.09 100.00 106.14
DeltaE to D50/ D65	17.51/ 2.49
Assumed Target Whitepoint (2)	6200 Kelvin
DeltaE to Assumed Target Whitepoint	2.13
Brightness (3)	261.30 cd/m ²
Black Point (3)	0.20 cd/m ²
Contrast (x:1)	1307:1
Gradation (Average)	2.14


(2) Daylight (3) Measured separately

	Percent	Kelvin	Delta C	Delta E	Gamma
	5	-	-	-	-
	10	7616	3.50	4.03	2.11
	15	7093	3.34	3.57	2.14
	20	7259	4.47	4.57	2.17
	25	7185	4.48	4.51	2.17
	30	7221	5.55	5.55	2.17
	35	7183	5.95	5.97	2.16
	40	7261	6.92	6.96	2.16
	45	7190	6.93	7.03	2.15
	50	7087	6.83	6.96	2.14
	55	7020	7.04	7.14	2.15
	60	7023	7.69	7.76	2.16
	65	7025	7.81	7.87	2.17
	70	6944	7.86	7.92	2.16
	75	6925	8.21	8.25	2.17
	80	6879	8.30	8.34	2.15
	85	6892	8.68	8.71	2.14
	90	6823	8.56	8.59	2.08
	95	6624	6.83	6.86	1.92
	100 (4)	6214	-	-	-
	Average (5)	-	6.79	6.86	2.14
	Maximum (5)	-	8.68	8.71	-
	Range (5)	-	8.68	-	-

(4) Visual adaptation to display whitepoint is assumed

(5) Only luminance > 1% considered

Corresponding Gamma

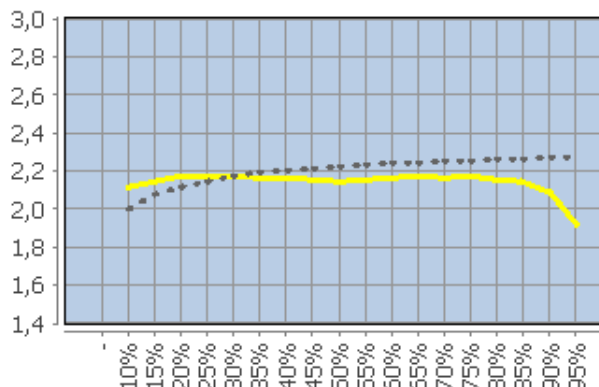

Colorimetric Report

Page (2/4)



CCalc 2.5
Copyright © 2020, Denis Freund
All Rights Reserved
lic. for PRAD ProAdviser

Date	Saturday, April 1, 2023
Tester	
Display	MSI_MD272
Sensor	X-Rite i1 Pro
Testchart	In accordance with ISO 12646:2007 (1)
Target	sRGB
Display Profile	Not considered
Rendering Intent	-

(1) Five equally spaced code values for each channel

	RGB	Delta C	Delta H	Delta L	Delta E94
	0 0 0	0.51	0.00	1.13	1.24
	0 0 63	0.84	1.61	2.44	2.64
	0 0 127	3.77	1.46	5.56	5.66
	0 0 191	6.04	1.62	6.57	6.67
	0 0 255	10.35	0.48	6.65	6.82
	0 63 0	5.71	2.25	1.03	2.58
	0 63 63	2.22	5.07	0.51	4.19
	0 63 127	7.81	6.32	1.19	4.87
	0 63 191	5.94	4.65	2.63	3.62
	0 63 255	0.73	4.85	3.02	3.52
	0 127 0	4.32	3.22	0.23	1.88
	0 127 63	2.31	3.17	0.17	1.91
	0 127 127	1.72	7.68	1.20	5.49
	0 127 191	4.19	6.65	2.09	4.82
	0 127 255	0.03	4.76	2.42	3.31
	0 191 0	5.80	4.15	0.42	2.06
	0 191 63	4.89	4.34	0.42	2.22
	0 191 127	5.54	7.34	0.06	4.16
	0 191 191	2.45	8.76	0.73	5.57
	0 191 255	1.38	4.40	1.04	2.84
	0 255 0	7.05	5.61	0.81	2.43
	0 255 63	6.64	5.86	0.77	2.58
	0 255 127	6.54	7.85	0.58	3.63
	0 255 191	5.64	8.44	0.03	4.45
	0 255 255	2.38	1.22	0.23	1.04
	63 0 0	3.25	0.15	0.19	1.33
	63 0 63	1.68	2.28	1.06	1.84
	63 0 127	1.00	2.42	3.85	4.02
	63 0 191	4.24	1.77	5.67	5.76
	63 0 255	9.31	0.35	6.13	6.28
	63 63 0	6.23	1.01	1.03	2.70
	63 63 63	4.77	0.25	0.64	4.82
	63 63 127	8.46	2.24	0.94	3.42
	63 63 191	6.24	3.15	2.46	3.17
	63 63 255	1.03	4.47	2.82	3.29
	63 127 0	3.16	4.90	0.22	2.62
	63 127 63	1.83	3.96	0.33	2.47
	63 127 127	0.10	7.26	1.21	5.63
	63 127 191	4.91	4.86	2.06	4.08
	63 127 255	0.20	4.14	2.34	3.06
	63 191 0	4.59	6.42	0.52	2.88
	63 191 63	3.94	5.64	0.42	2.75
	63 191 127	5.44	7.43	0.07	4.38
	63 191 191	1.76	8.58	0.81	5.70
	63 191 255	1.04	3.98	1.11	2.67
	63 255 0	5.67	8.42	1.15	3.39
	63 255 63	5.44	8.11	1.05	3.40

Colorimetric Report

Page (3/4)



CCalc 2.5
Copyright © 2020, Denis Freund
All Rights Reserved
lic. for PRAD ProAdviser

Date	Saturday, April 1, 2023
Tester	
Display	MSI_MD272
Sensor	X-Rite i1 Pro
Testchart	In accordance with ISO 12646:2007 (1)
Target	sRGB
Display Profile	Not considered
Rendering Intent	-

(1) Five equally spaced code values for each channel

	RGB	Delta C	Delta H	Delta L	Delta E94
	63 255 127	6.60	8.68	0.65	4.05
	63 255 191	5.72	8.62	0.06	4.66
	63 255 255	2.17	1.19	0.20	1.01
	127 0 0	3.05	2.79	0.64	1.79
	127 0 63	1.04	1.33	1.14	1.40
	127 0 127	0.75	3.15	2.82	3.22
	127 0 191	1.73	1.66	4.48	4.54
	127 0 255	7.13	0.27	5.09	5.20
	127 63 0	3.87	5.22	0.33	3.21
	127 63 63	1.46	4.80	0.13	3.36
	127 63 127	7.65	2.57	1.00	3.14
	127 63 191	6.54	0.80	2.17	2.65
	127 63 255	1.61	3.62	2.39	2.77
	127 127 0	5.55	1.42	0.44	1.77
	127 127 63	4.44	0.73	0.58	1.86
	127 127 127	7.02	0.38	1.37	7.15
	127 127 191	6.24	1.89	2.14	3.41
	127 127 255	0.52	3.43	2.27	2.81
	127 191 0	6.31	3.98	0.31	2.24
	127 191 63	5.91	3.67	0.21	2.31
	127 191 127	7.56	5.37	0.28	4.20
	127 191 191	0.81	8.63	0.93	6.62
	127 191 255	0.19	3.76	1.12	2.65
	127 255 0	7.64	6.54	0.97	2.95
	127 255 63	7.17	6.26	0.86	2.95
	127 255 127	8.19	7.09	0.49	3.76
	127 255 191	6.94	7.65	0.10	4.70
	127 255 255	2.57	1.04	0.33	1.22
	191 0 0	4.51	4.12	0.32	2.07
	191 0 63	1.93	2.52	0.53	1.42
	191 0 127	0.37	5.26	1.74	3.06
	191 0 191	0.13	3.15	3.13	3.39
	191 0 255	5.09	0.55	3.93	4.01
	191 63 0	3.68	6.08	0.42	3.01
	191 63 63	0.63	5.51	0.25	2.94
	191 63 127	4.62	6.86	0.56	3.95
	191 63 191	6.03	2.78	1.52	2.39
	191 63 255	2.13	2.33	1.79	2.04
	191 127 0	6.31	1.13	0.36	1.72
	191 127 63	5.02	2.13	0.47	2.07
	191 127 127	0.62	7.25	1.11	5.29
	191 127 191	5.30	2.97	1.69	3.09
	191 127 255	0.81	2.09	1.88	2.14
	191 191 0	7.91	1.65	0.24	1.93
	191 191 63	7.45	1.28	0.23	2.05
	191 191 127	9.31	0.54	0.21	3.71
	191 191 191	8.41	0.47	0.80	8.45

Colorimetric Report

Page (4/4)



CCalc 2.5
Copyright © 2020, Denis Freund
All Rights Reserved
lic. for PRAD ProAdviser

Date	Saturday, April 1, 2023
Tester	
Display	MSI_MD272
Sensor	X-Rite i1 Pro
Testchart	In accordance with ISO 12646:2007 (1)
Target	sRGB
Display Profile	Not considered
Rendering Intent	-

(1) Five equally spaced code values for each channel

	RGB	Delta C	Delta H	Delta L	Delta E94
	191 191 255	1.08	2.53	0.98	1.99
	191 255 0	9.33	4.74	0.87	2.67
	191 255 63	8.78	4.55	0.78	2.70
	191 255 127	9.54	5.02	0.43	3.45
	191 255 191	8.30	6.11	0.12	4.83
	191 255 255	1.96	0.67	0.30	1.17
	255 0 0	4.15	4.47	0.77	2.04
	255 0 63	2.56	3.36	0.77	1.69
	255 0 127	0.79	6.09	1.56	3.11
	255 0 191	0.03	4.64	2.35	3.03
	255 0 255	3.72	1.47	1.94	2.10
	255 63 0	3.50	6.79	0.05	2.83
	255 63 63	1.19	6.04	0.11	2.69
	255 63 127	2.13	8.11	0.70	3.91
	255 63 191	4.70	5.63	0.95	2.84
	255 63 255	2.30	1.09	0.13	0.60
	255 127 0	6.12	3.65	0.56	2.11
	255 127 63	4.44	4.19	0.57	2.35
	255 127 127	1.81	7.67	1.14	4.43
	255 127 191	2.85	5.98	1.46	3.64
	255 127 255	0.16	0.97	0.77	0.89
	255 191 0	8.09	1.64	0.00	1.85
	255 191 63	7.63	2.34	0.03	2.15
	255 191 127	7.38	5.61	0.43	4.21
	255 191 191	1.02	8.31	0.90	6.15
	255 191 255	0.21	0.53	0.39	0.52
	255 255 0	10.66	1.63	0.70	2.21
	255 255 63	10.16	1.36	0.61	2.24
	255 255 127	11.01	0.88	0.27	2.93
	255 255 191	10.25	0.22	0.25	4.20
	255 255 255 (1)	-	-	-	-
	Average (2)	4.37	3.91	1.24	3.26
	Maximum (2)	11.01	8.76	6.65	8.45

(1) Visual adaptation to display whitepoint is assumed; CIELAB reference values are adapted (Bradford transformation) to display whitepoint
(2) Without Black

Color Space	Gamut Volume CIELAB D50
sRGB	87%